


In the hierarchy of colours, green represents the social middle class, self-satisfied, immovable, narrow...

-Wassily Kandinsky



"Red has always been my colour, because red stands out" -Ravyn Lenae

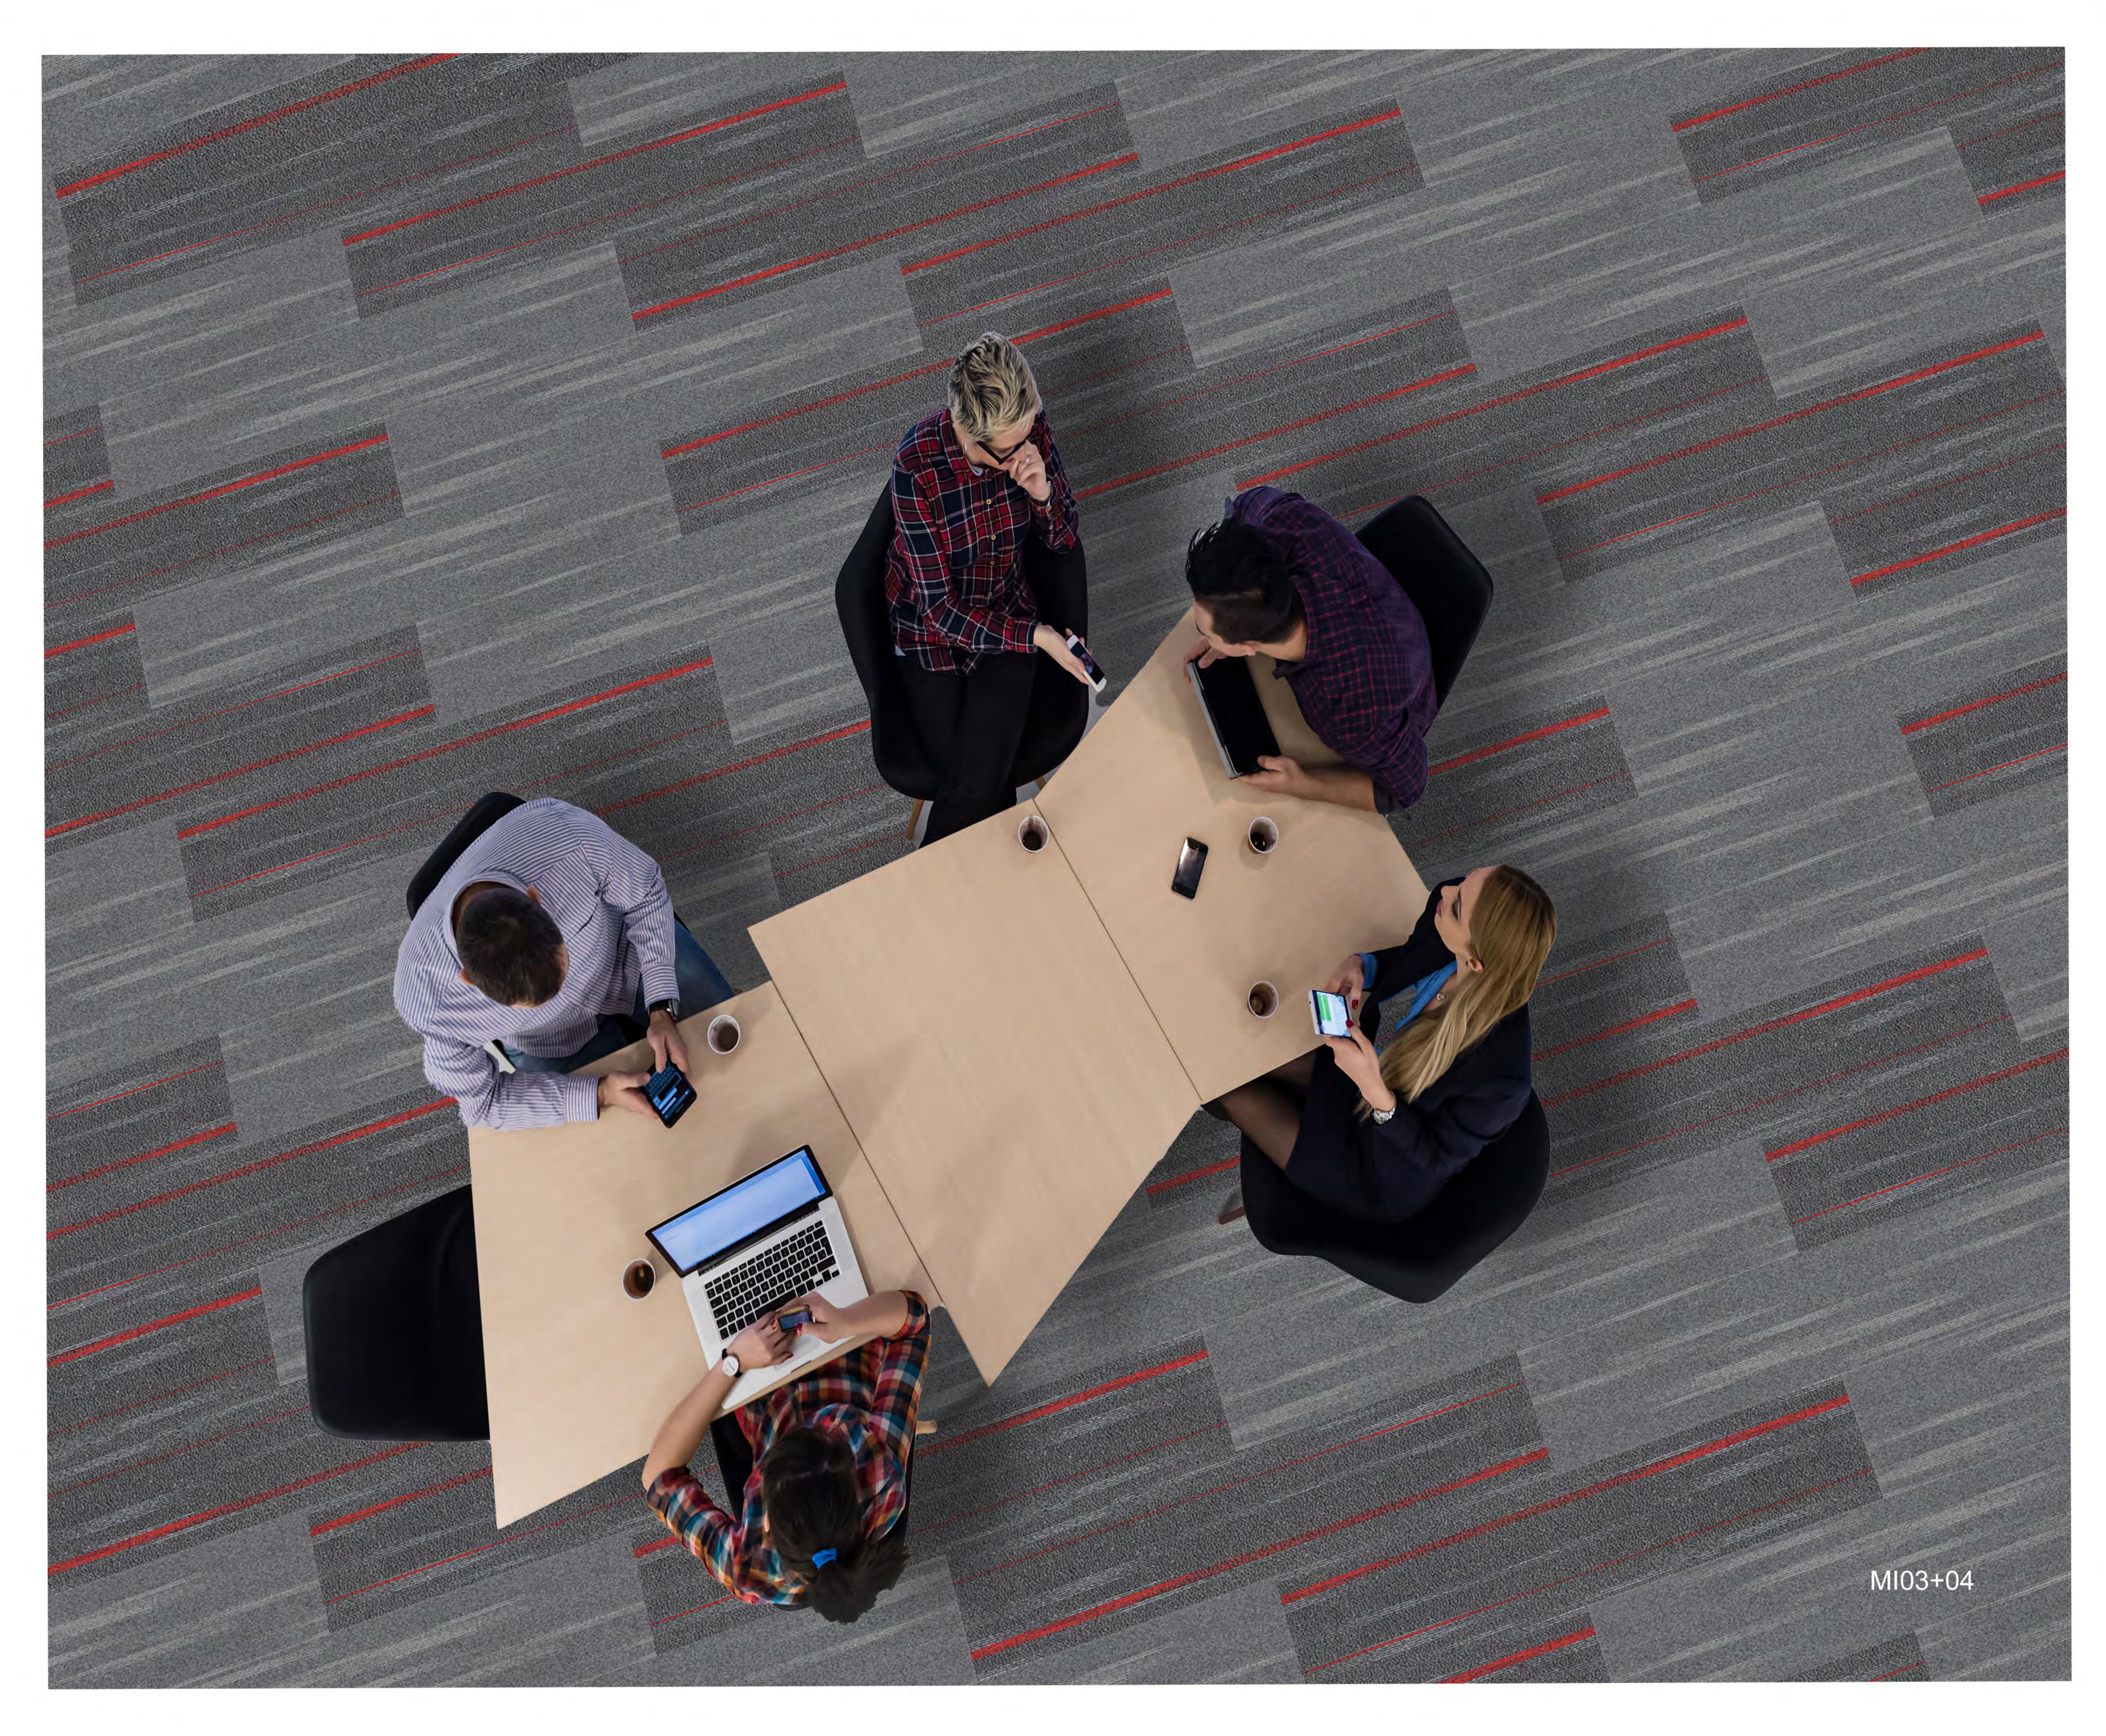







"GRAY is the queen of colours, because she makes everyone else look good"

-Helen Van Wyk




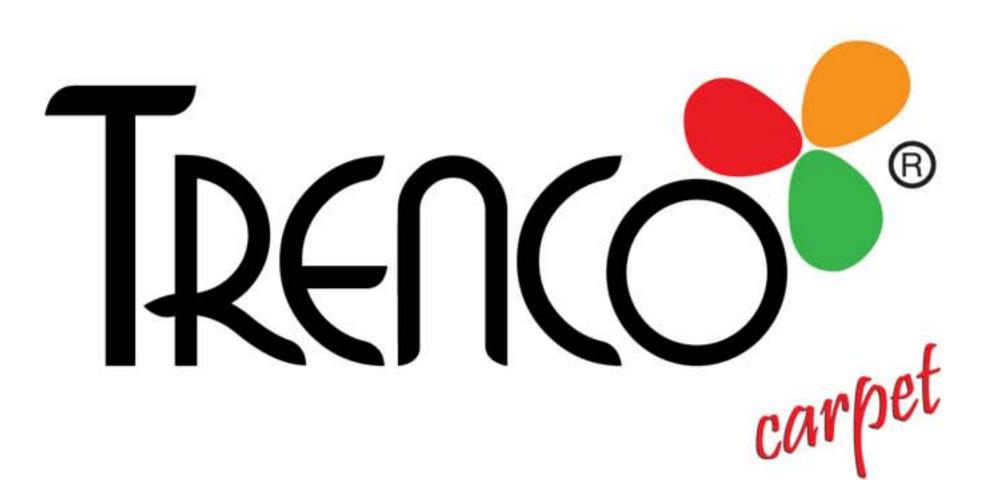

## MILAN PLANK

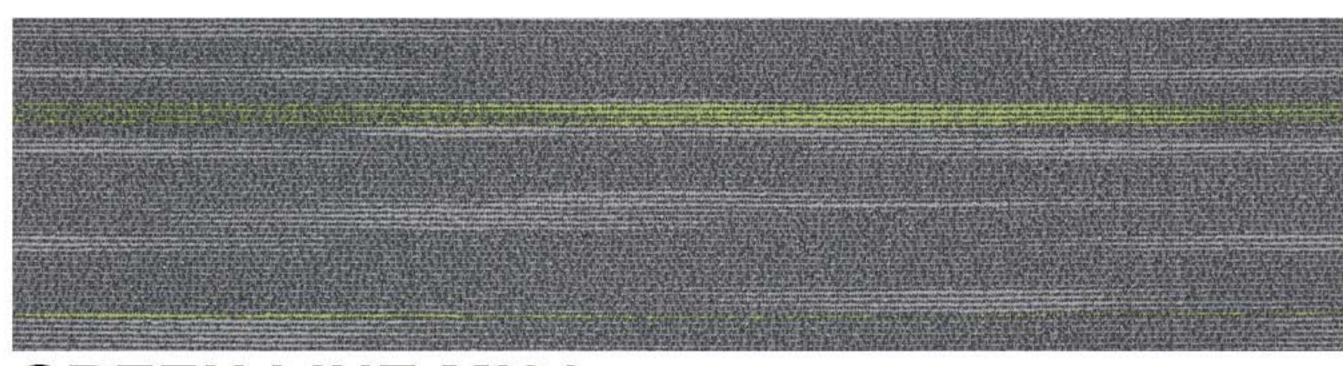


**GREEN LINE MI01** 

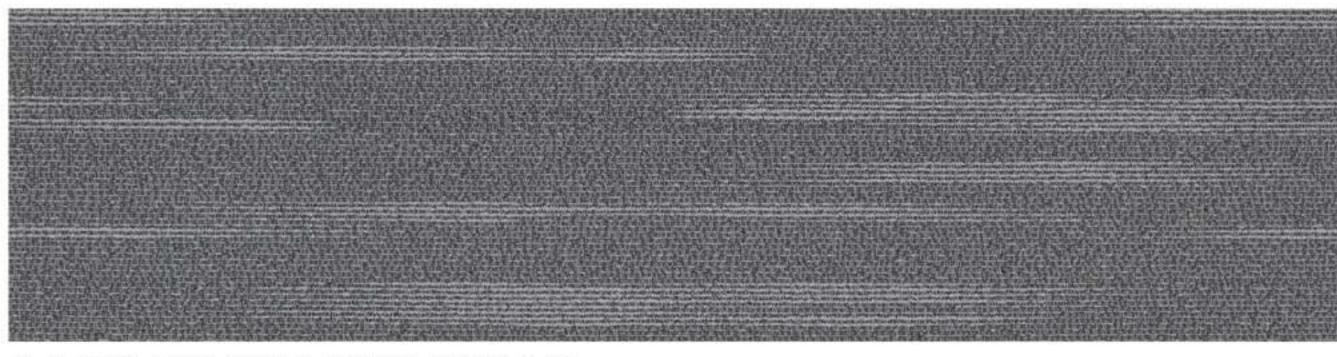


**LIGHT TONE MI02** 




**BLUE LINE MI03** 

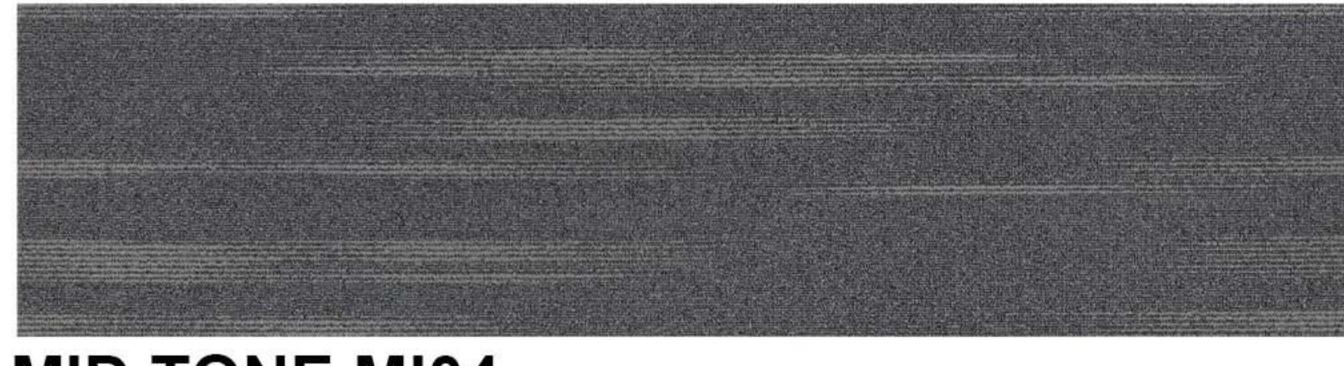

MID TONE MI04

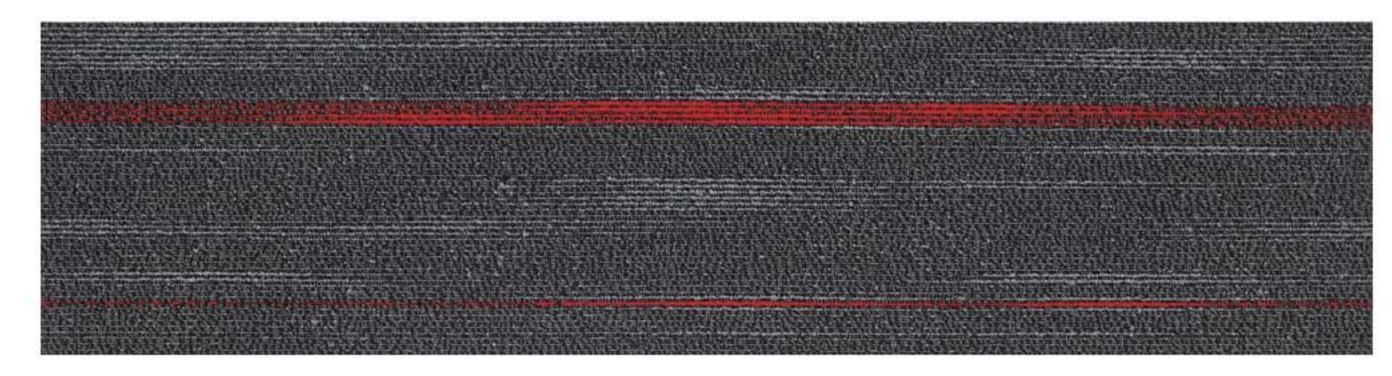

**RED LINE MI05** 

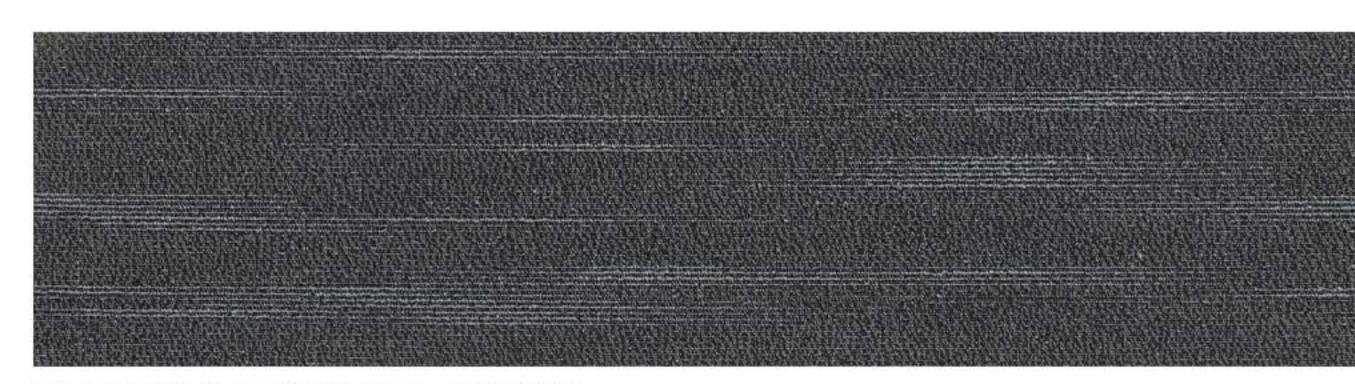

**DARK TONE MI06** 

## **SPECIFICATIONS**

STYLE NAME: MILAN PLANK
CONSTRUCTION: Tufted Textured Loop

YARN: 100% Universal Nylon DYED METHOD: 100% Solution Dyed

GAUGE: 1/12"

PILE HEIGHT: 4mm (+/- 0.5 mm)
TOTAL THICKNESS: 6mm (+/- 0.5mm)

PILE WEIGHT: 500g/m<sup>2</sup>

TILE BACKING: Recycled PVC backing

PRIMARY BACKING CLOTH: Non-woven Polyester Spunbonded YARN TREATMENTS: 3M Scotchgard Permanently Anti Static

ANTI-SOIL,OIL TREATMENT: 3M Scotchgard TILE SIZE: 25cm x 100cm

PACKING: 20 PCS


RADIANT PANEL: Passes (ASTM E 648) Class1


SMOKE DENSITY: Passes (ASTM E 662) less than 450 STATIC PROPENSITY: Passes (AATCC-134) less than 3.5 kv

SINGAPORE GREEN LABEL: 039-025-2280

WARRANTY: 10-Year Carpet Wear Warranty

## RECOMMENDED INSTALLATION METHODS

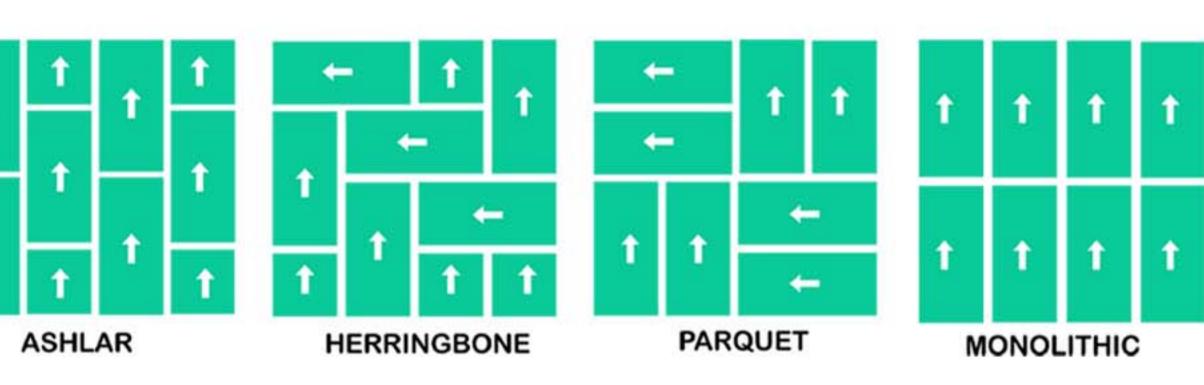

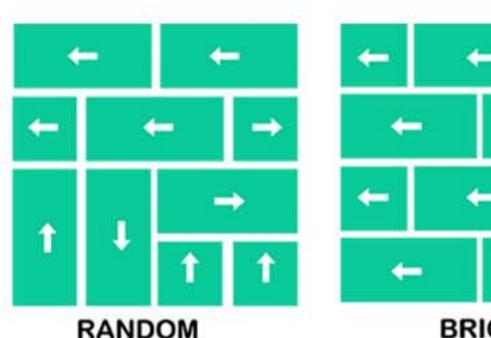

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.











