

TRENCO®
Flooring is an art



CLASSICO CLIC 2(v2)



BEAUTY SNOW CC443






SILVER DOLLAR CC192





SOHO GREY CC056



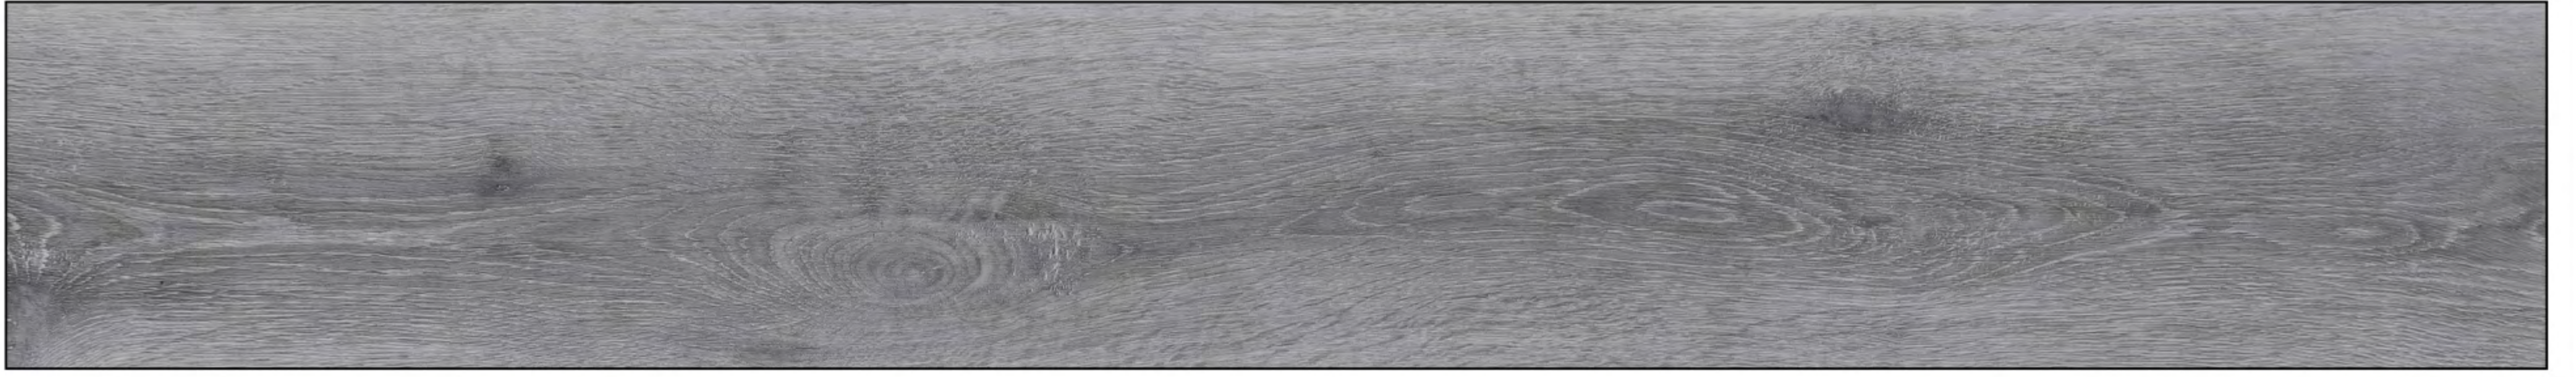

STARLIGHT CC872





SANDSTORM CC751






FRENCH MAPLE CC820





NEW ALMOND CREAM CC716



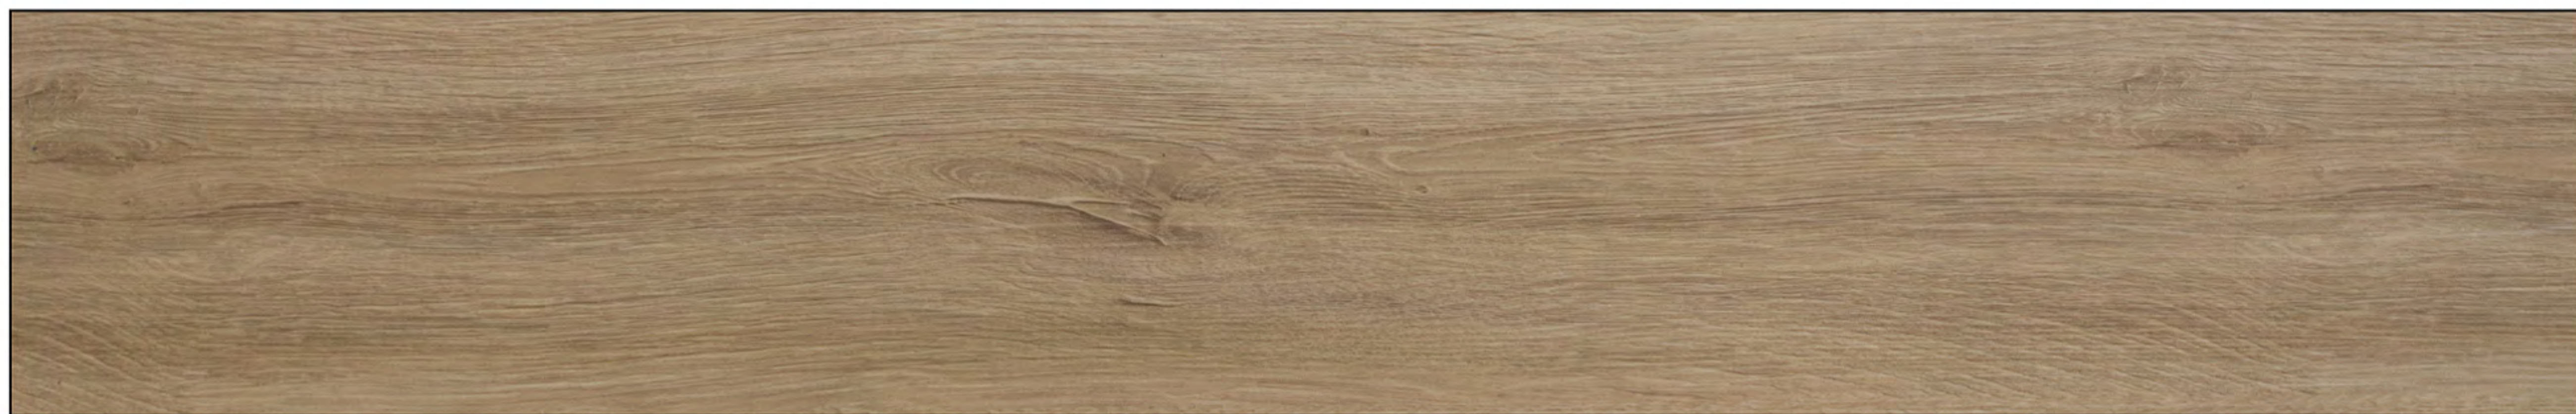


EURO OAK CC242





WARM CHESTNUT CC042



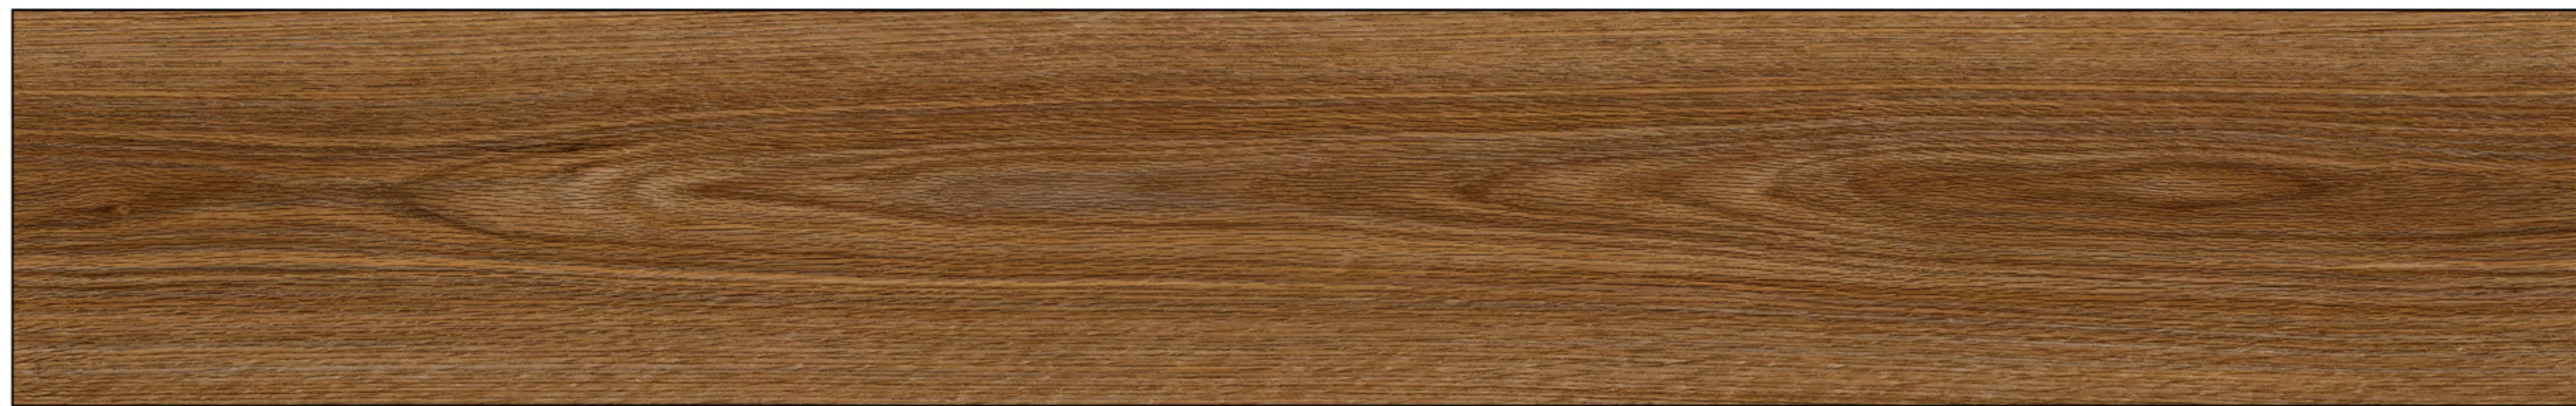

GOLDEN HONEY CC830





RUSTIC BROWN CC791





SUMMER OAK CC422






BAMBOO OAK CC083





EVENING PINE CC214



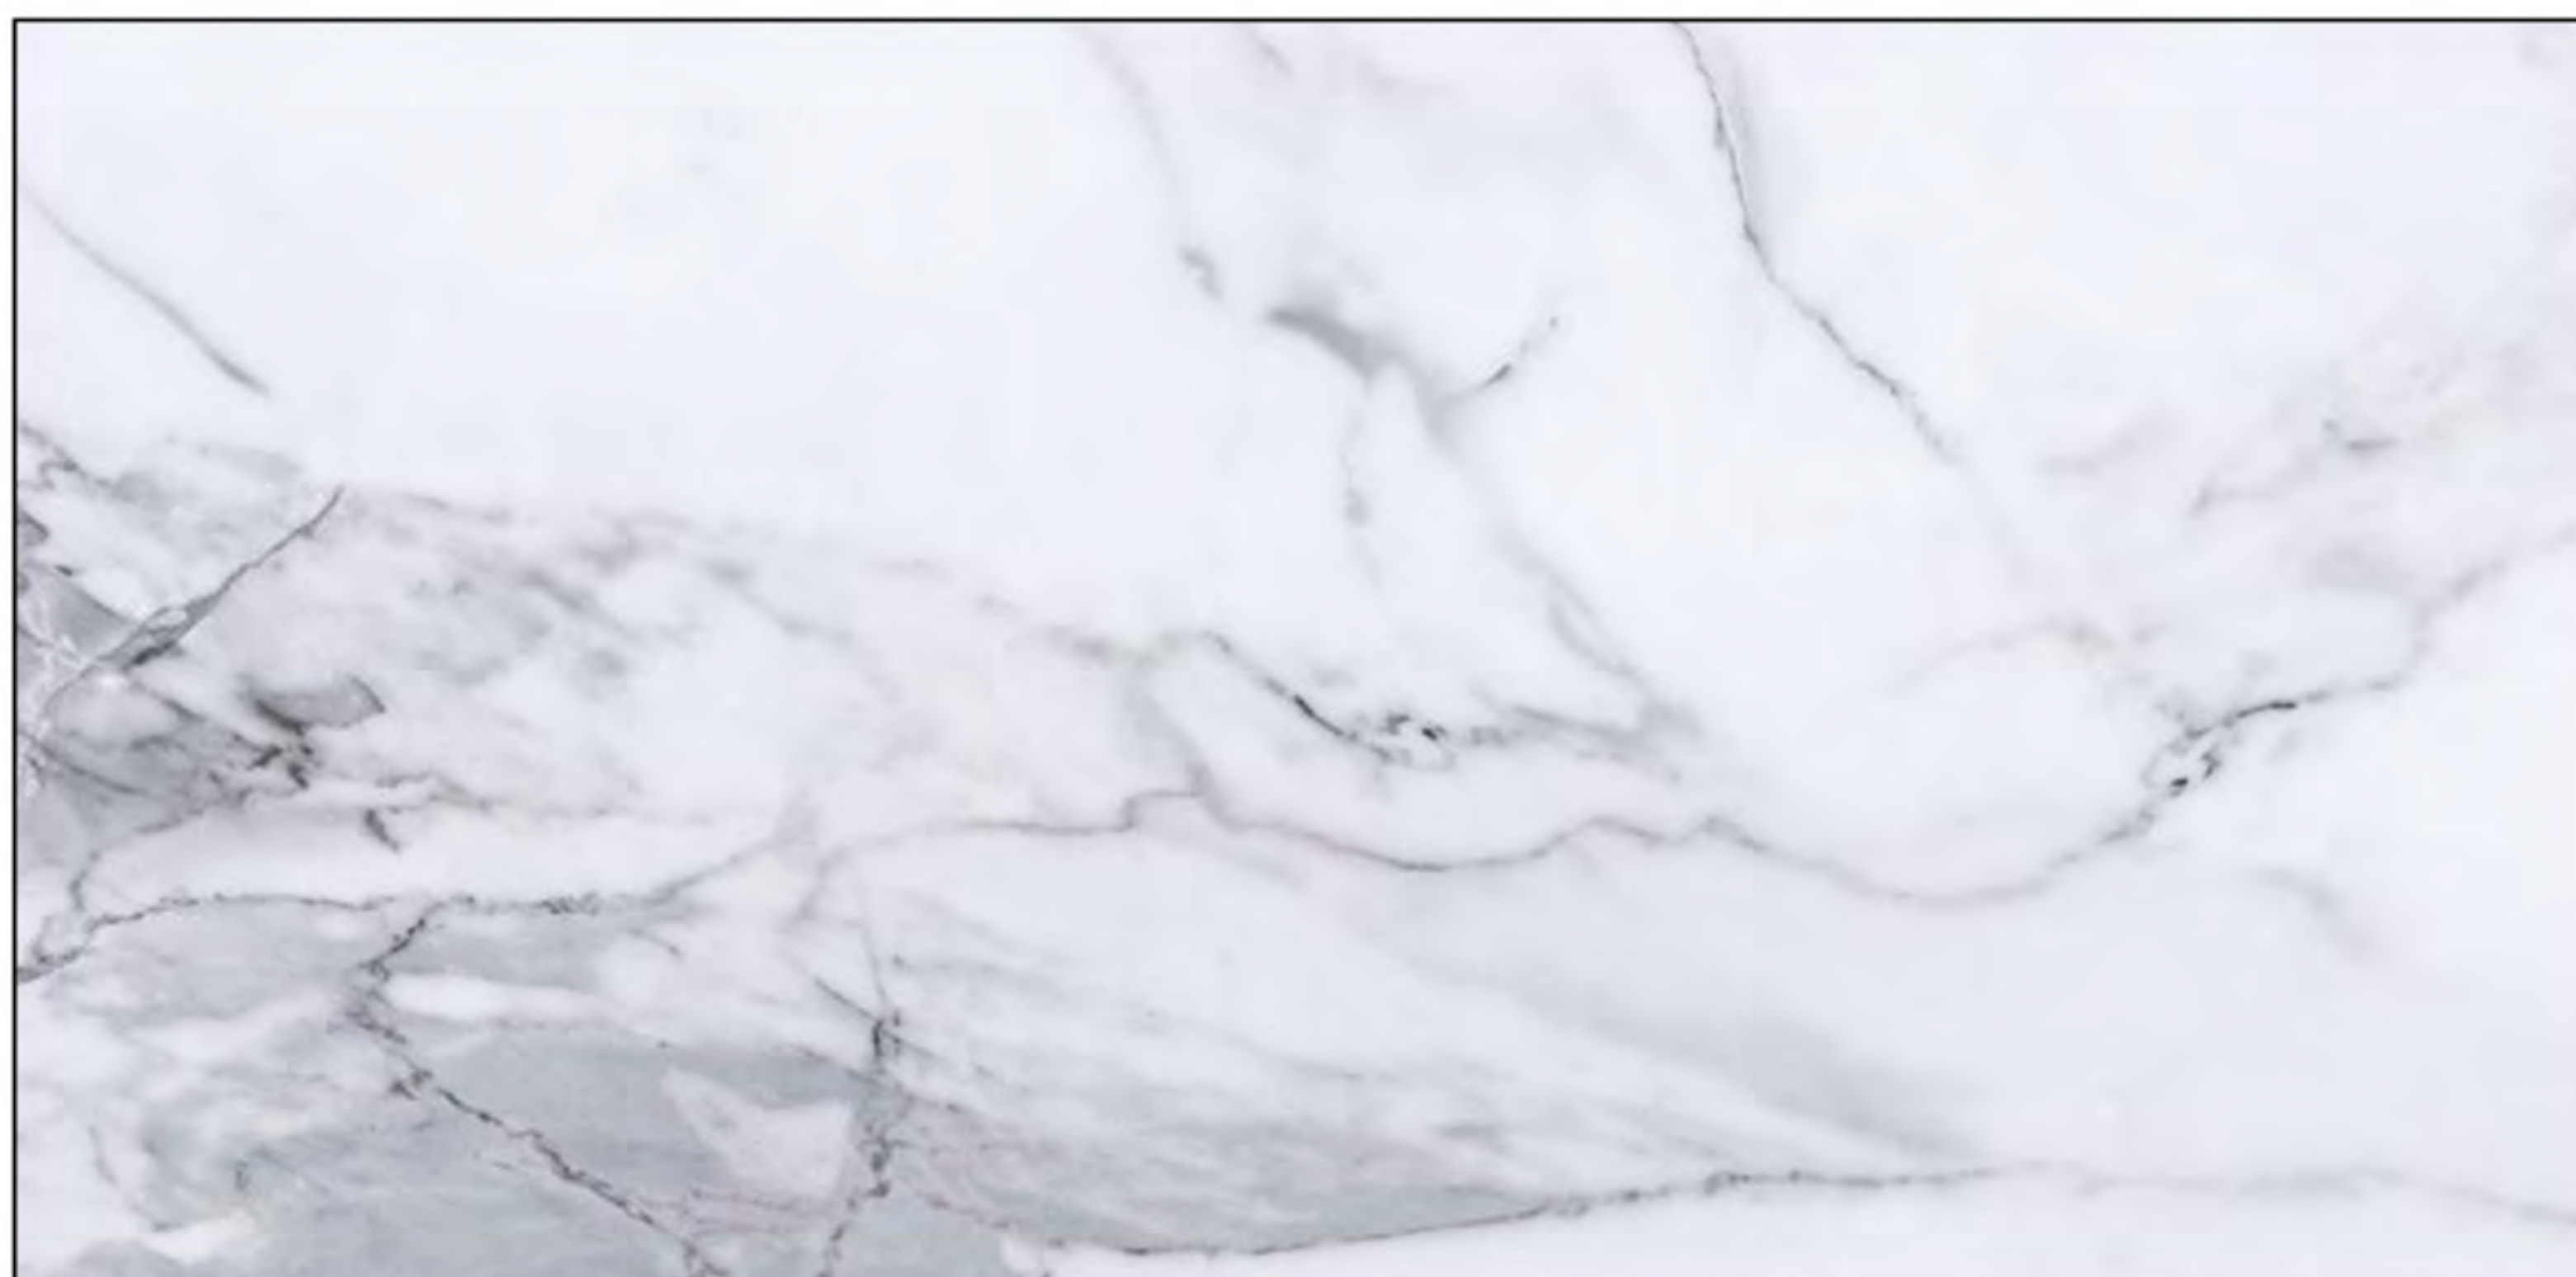

MARBLE SLATE CC701





MOSAIC SLATE CC836





SILVER SLATE CC053





CEMENT SLATE CC093



INTRODUCTION: Why use Classico Clic 2?


- * **Flexibility of design options**
 - available in a large number of colours & styles.
- * **Resilience**
 - reduces noise & provides underfloor comfort
- * **Durability**
 - Classico Clic is moisture & stain resistant, so spills can be easily removed
- * **Water resistant**
 - good choice for kitchen & mudroom
- * **Bio based plasticiser**
 - is made from 100% organic raw material
- * **Anti-microbial**
 - suitable for hospitals, schools as well as kid's nursery rooms
- * **Environmental friendly**
 - creates no toxin, Classico Clic uses one of the best plasticizer DOTP.
- * Classico clic has passed certification of Floorscore, Greenguard & DIBt

INSTALLATION

1. Substrate must be structurally smooth, stable, level, clean and must be dry <80% RH
2. Materials must be acclimatized on site at least 48 hours at room temperature before installing

CARE & MAINTENANCE

- * Maintain regular sweeping, mopping or vacuuming the floor to remove all loose dirt and grit.
- * Do not use a vacuum with a bristle beater bar or scrub brushes to avoid scratching the floor.
- * Do not use acetone based liquids such as nail polish remover to clean stains. Use a neutral PH cleaner.
- * If buffing is needed, use only red buffing pad. Do not use green, black or brown buffing pads.
- * Clean liquid spills immediately to prevent the possibility of stains, slips or falls.
- * Always use floor protection pads when moving heavy objects across the floor to avoid permanent marks or indentations.
- * Avoid using scraping or sharp tools which could remove the wear layer of vinyl.
- * Avoid exposure to long period of strong sunlight without protection of shades

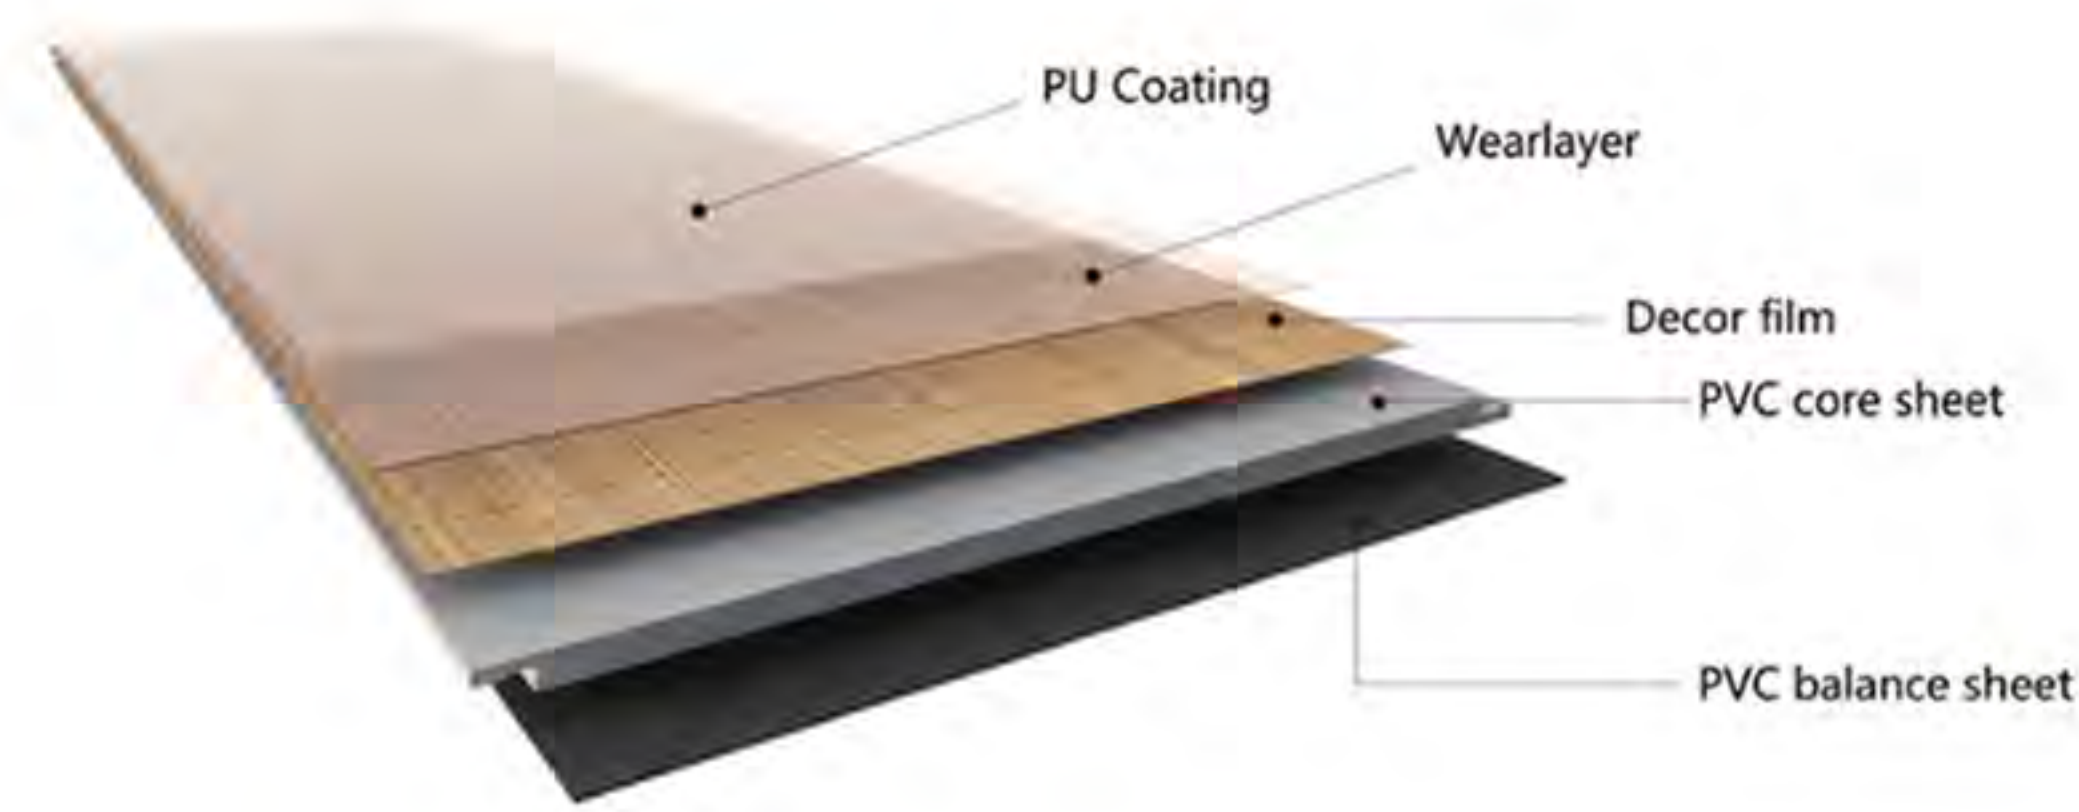

SPECIFICATIONS:

STYLE NAME	CLASSICO CLIC 2
Construction	Unilin Click System
Wear Resistance	Light Commercial/ Residential
Size	Plank :48" (1220 mm) x 7.09" (180 mm) Tile : 1.97" (600 mm) x 0.99" (300mm)
Total Thickness	5mm
Edge Description	Micro Bevelled Edge
Surface Finish	Antique Wood / Granite / Crystal Texture
Packing	10PCS/ CTN
Plank	23.64 SQFT/ CTN
Tile	19.38 SQFT / CTN
WARRANTY	5 - Year Limited Warranty For Commercial 20 - Year Limited Warranty For Residential

* AS IN ALL QUALITY VINYL FLOORINGS, COLOURS ARE SUBJECT TO BATCH VARIATIONS.

The product images shown are illustration purpose only and may not be an exact representation of the product.



Deutsches
Institut
für
Bautechnik



064-035-2902
Environmentally
Preferred Flooring