




DECORIA[®] **TIMBER** (3MM)
Made in KOREA

AMERICA OAK DT0022



MAPLE RIDGE DT3111

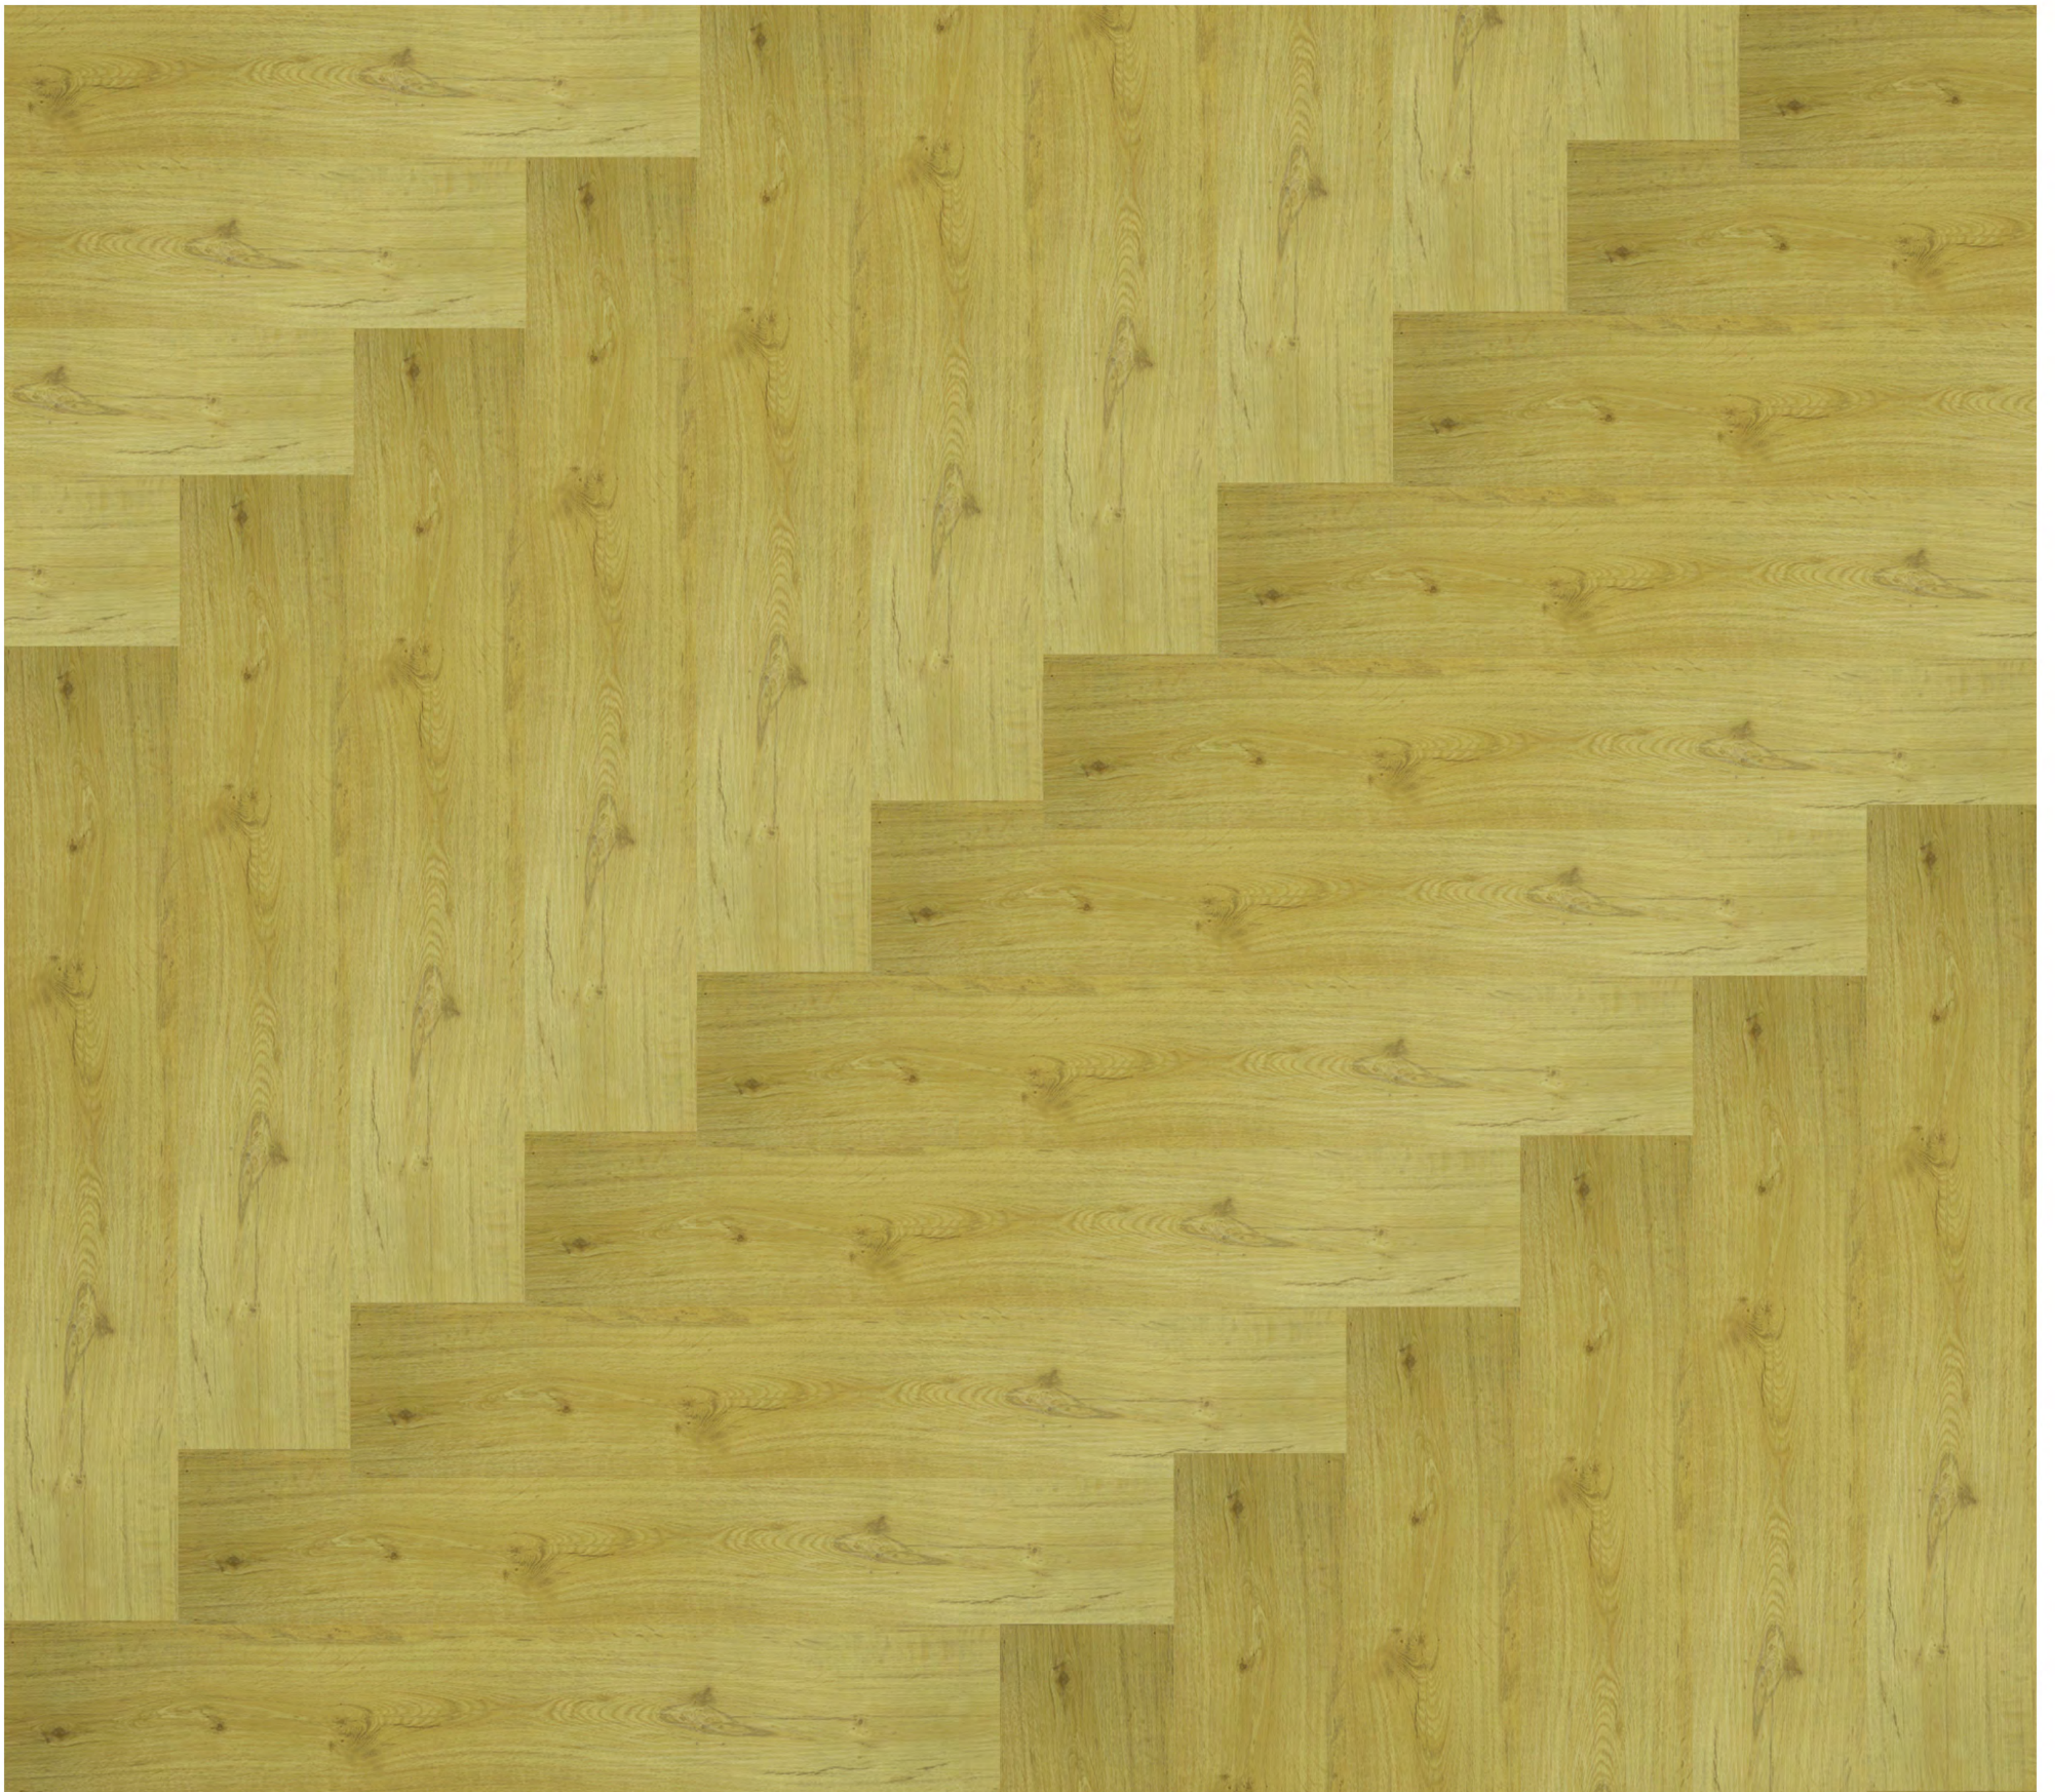


SMOKE FOREST DT3212



SPRING PINE DT3310



TIMBERLINE DT1909

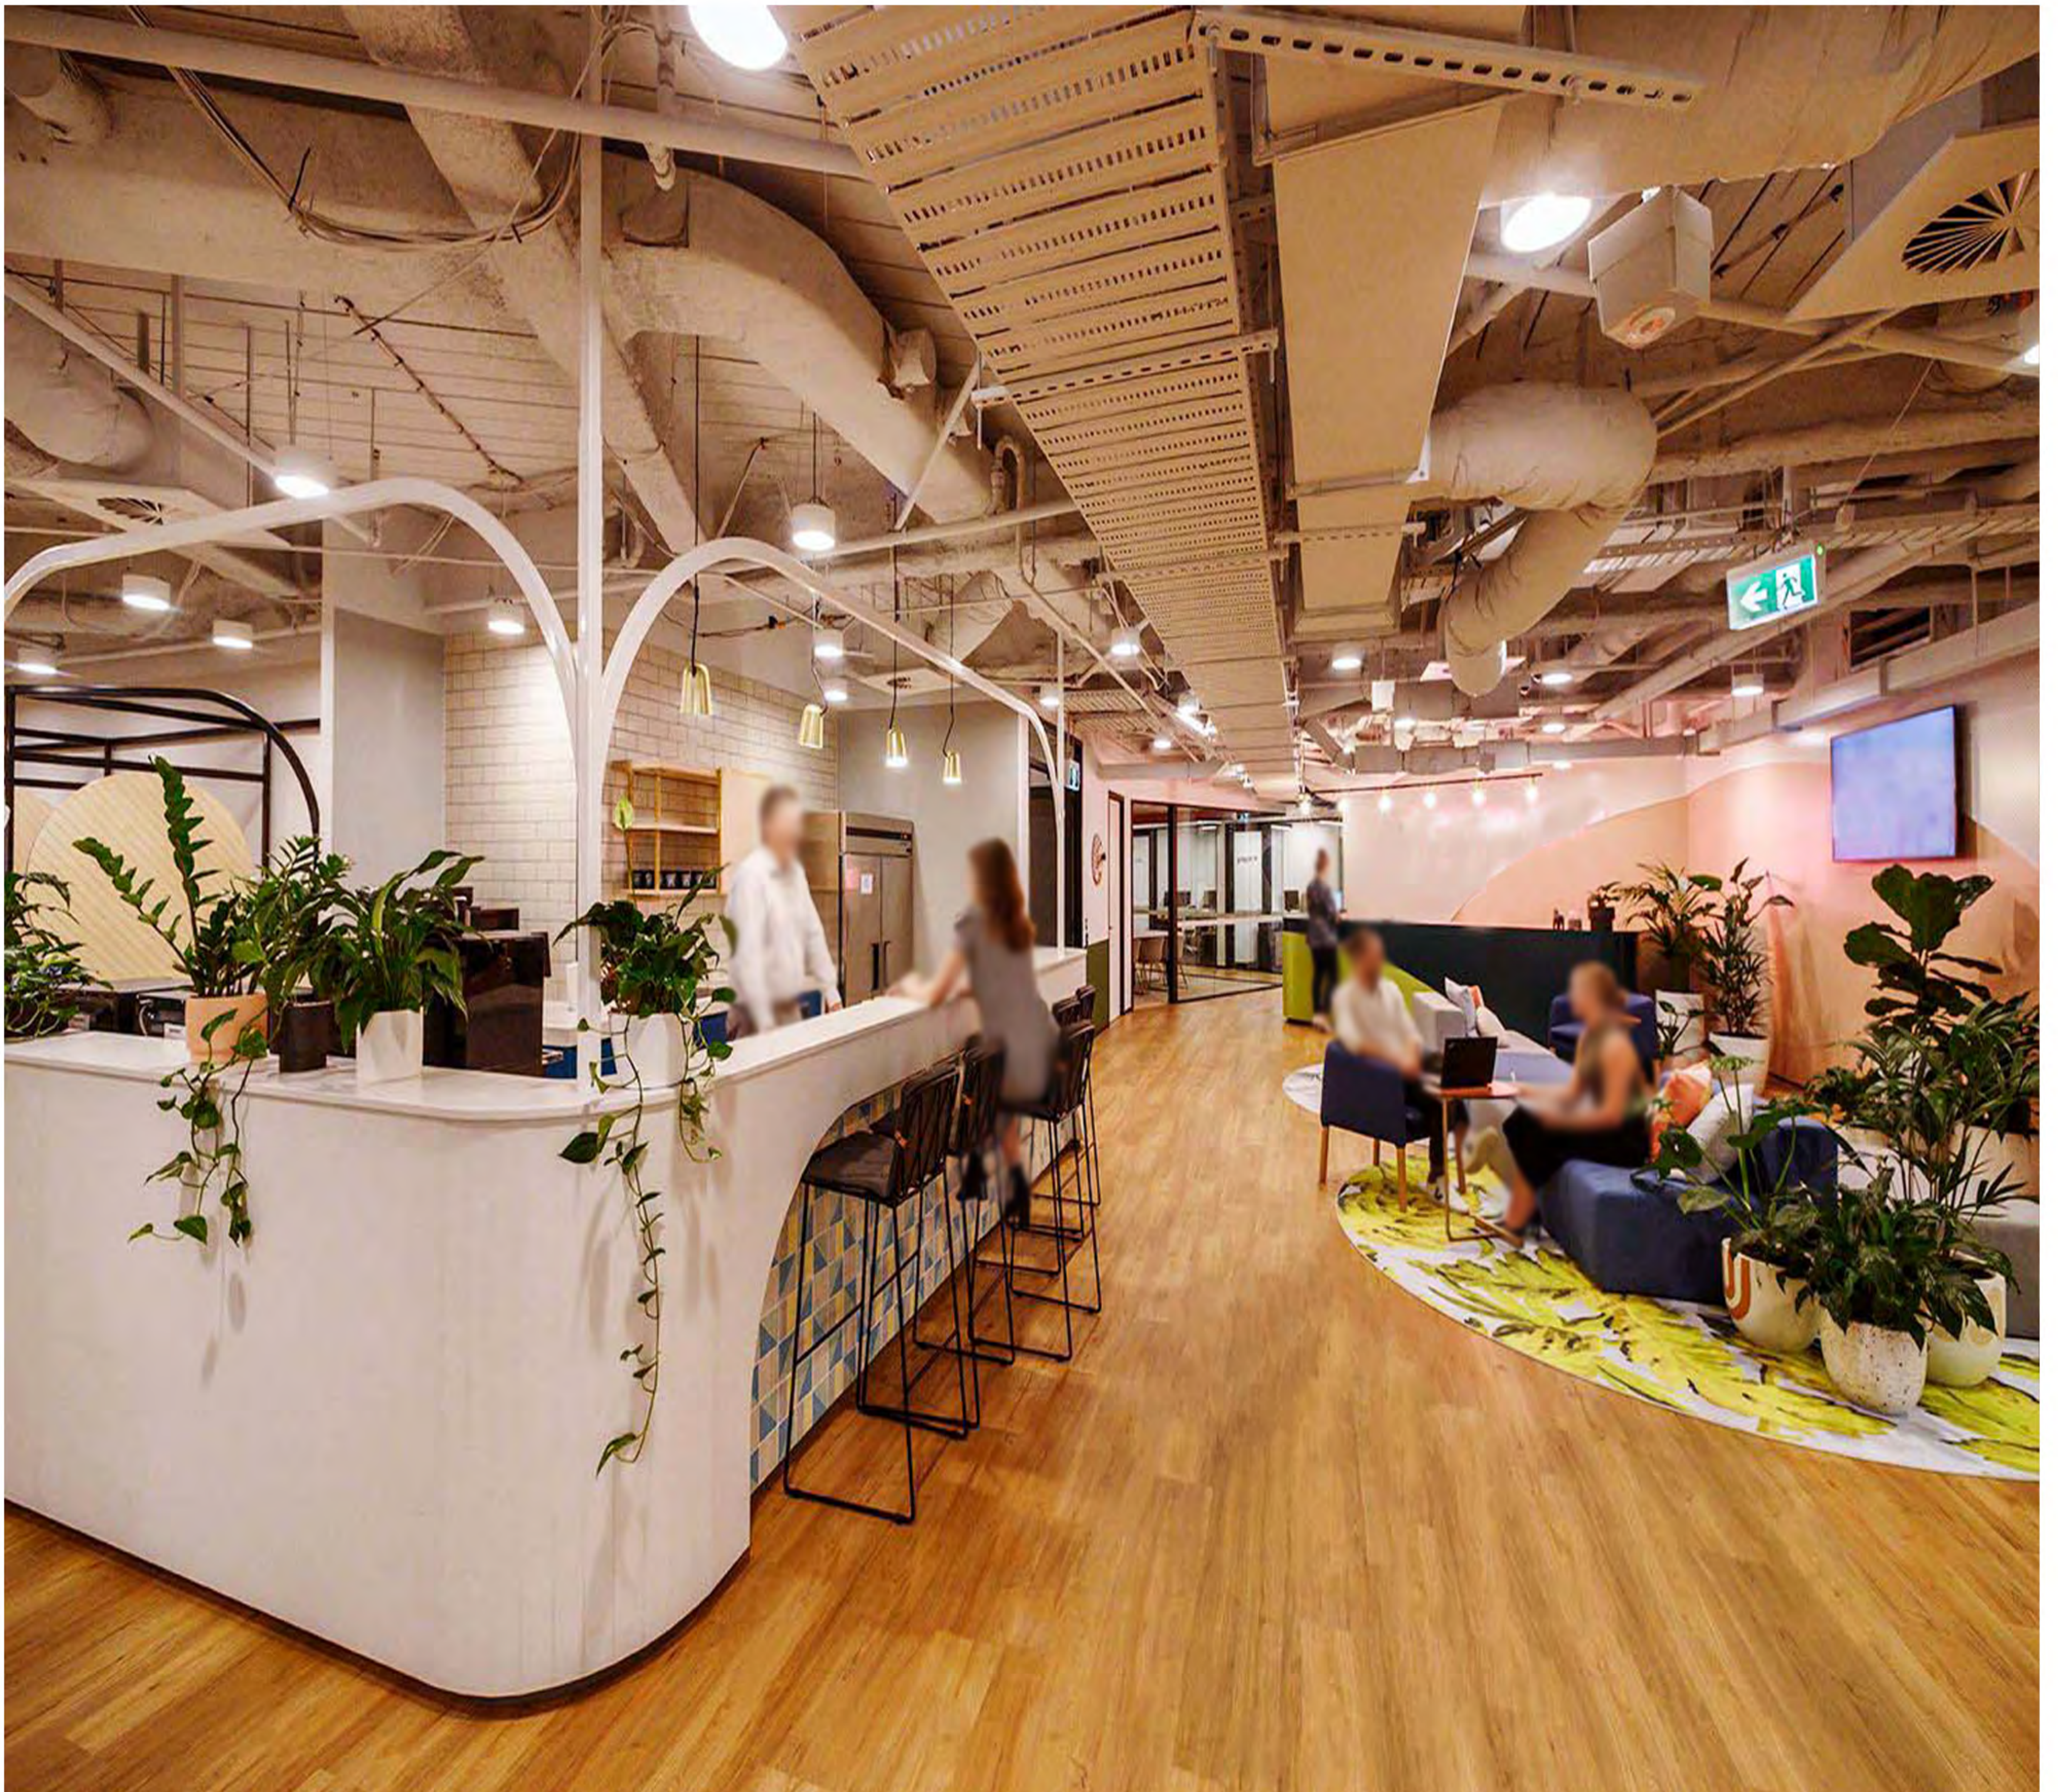

CARAMEL TEAK DT3325



IRON GATE DT0207



DARK SKY DT3312




METAL SLATE DT0742



ASH SLATE DT0743



STYLE NAME: DECORIA™ TIMBER (v2)
CONSTRUCTION: Dryback with glue
WEAR RESISTANCE: Light Commercial/ Residential
LENGTH: Plank: 48" (1219.2 mm) Tile: 24.6" (625mm)
WIDTH: Plank: 7" (177.8 mm) Tile: 12.36" (314mm)
TOTAL THICKNESS: 3mm
WEAR LAYER THICKNESS: 0.3mm
EDGE DESCRIPTION: Sealed edge
SURFACE FINISH: Antique Wood/ Semi-Wild/ Wild/ Pear Texture
PACKING: Plank: 15PCS/ CTN Tile: 18PCS/ CTN
 Plank: 35.01 SQFT/ CTN Tile: 37.98 SQFT/CTN

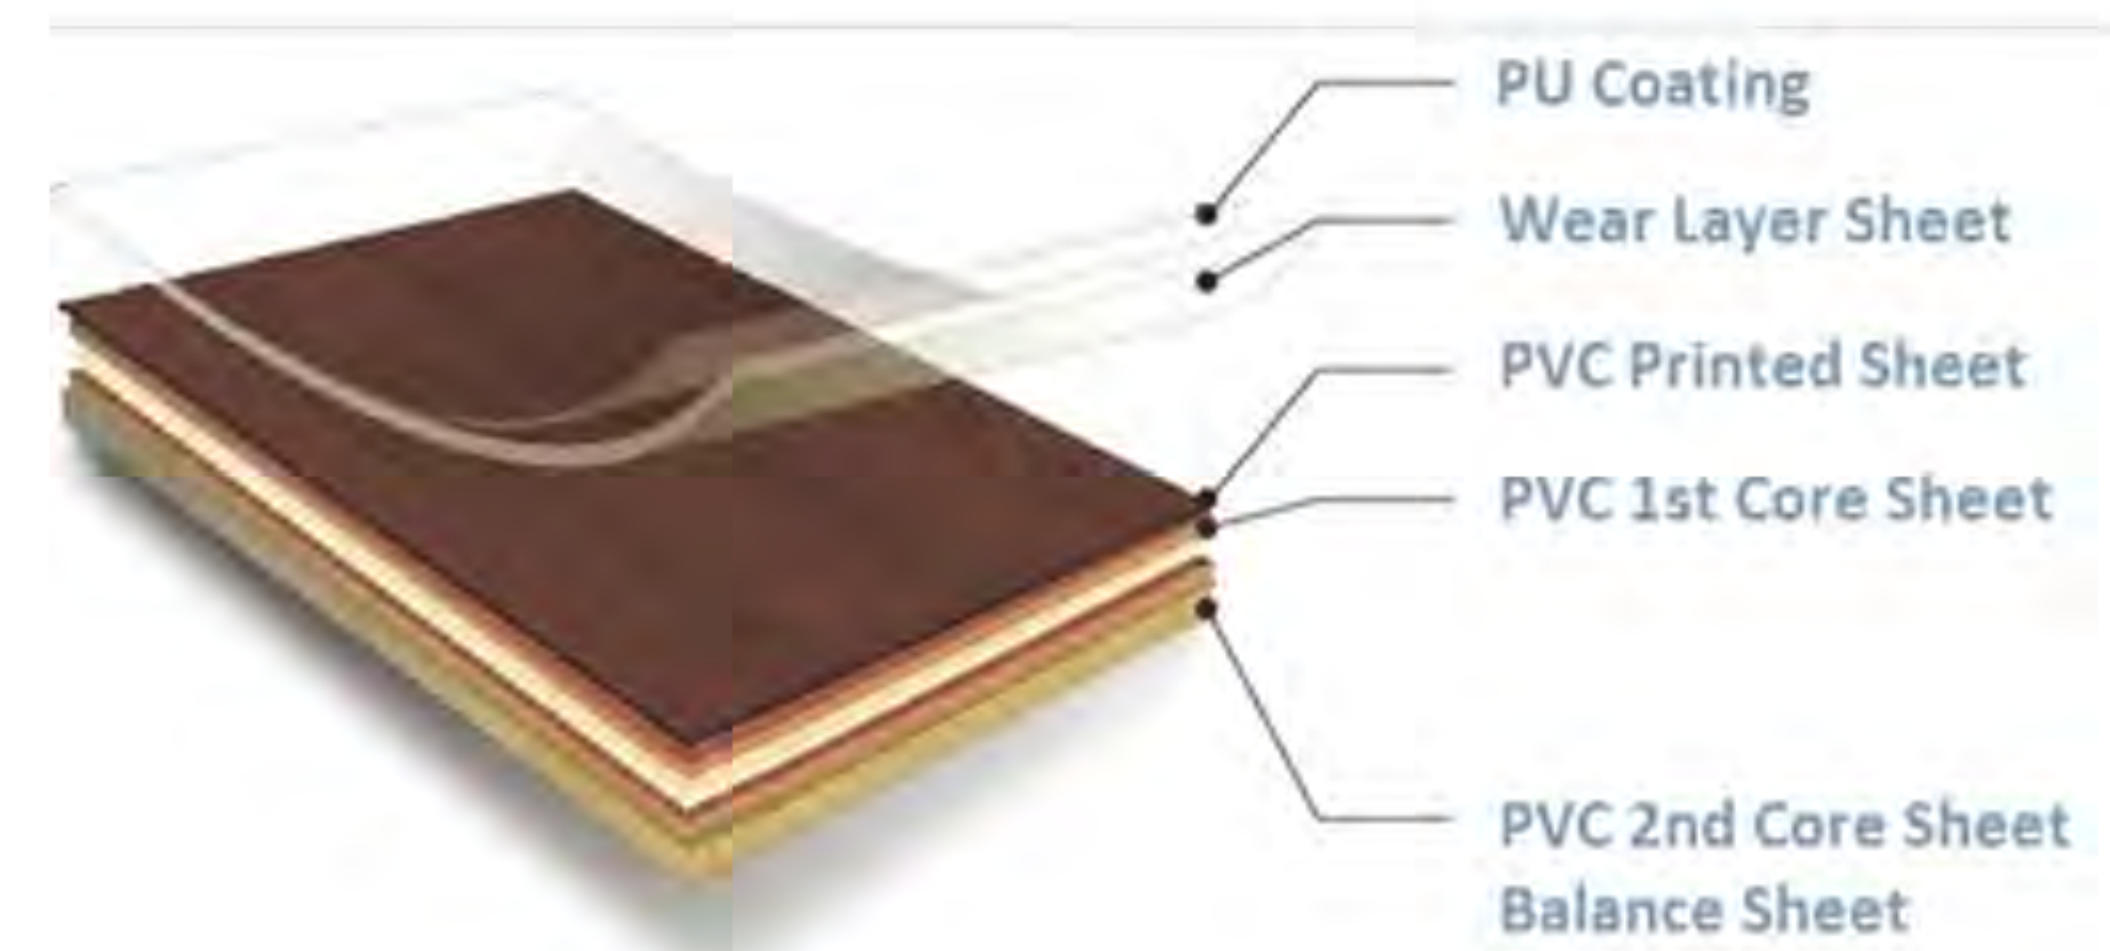

LIST OF PROPERTIES THAT MAKES DECORIA DISTINGUISHED

DECORIA is the leading manufacturer of LVT in Korea that has over 40 years of rich history especially with the new germ-killing technology. The flooring are innovated extensively to make home safe from bacteria. Every Decoria Tile is manufactured with the unique and exclusive surface treatment that give it's superior anti-slip and stain resistance. Decoria Tile is an ideal choice due to its versatility, long lasting and attractive features for your floor.



Custom Dimensional Options on Manufacturing: There is a flexibility of manufacturing in different dimensions for each patterns



100% Anti Termite: Vinyl flooring is not wood



High Density PU Coating: Assures you longer life comparing to normal PU coating and durability against scratches



Durability: Decoria is stain resistant, so spills can be easily removed



Resilience: Reduces noise & provides underfloor comfort



Water resistant: Recommended for living halls, bedrooms, kitchen, laundry & mudroom



Recycled Material: Decoria vinyl products are made with recyclable material, achieving environment sustainability



Anti-microbial: Suitable for hospitals, schools as well as kid's nursery rooms

PERFORMANCE

Characteristics	Standard	Criterion
Type & Composition		PVC Laminated Floor Covering
Application		Commercial, Residential
Surface Treatment		PU&Anti-bacterial, Per design approved by EPA
Profile		Sealed Edge, Per design
Antibacterial Effect		4.5(Visibly reduced after 24hours)
Tile Size (mm)	JIS Z 2801:2010	177.8x1219.2/314x625
Total Thickness (mm)	EN 427	3
Wear Layer Thickness (mm)	EN 428	0.3
Wear resistance	EN 429	Group P
Fire Rating	EN 660-2	B-S1
Emission of formaldehyde	EN 13501-1	CLASS 1
Slip Resistance	ASTM E 84	E1
(Static Coefficient of Friction)	EN717-2	Dry: 0.72(Slipperiness level:"Safe")
Residual Indentation	ASTM C1028	Wet: 0.67(Slipperiness level:"Safe")
(Static Coefficient of Friction)	(≥0.50)	≤0.10mm
Color Fastness	EN 433	≥ 6
Dimensional Stability	ISO 105-B02	≤ 0.25%
Flexibility	EN 434	No Crack was found
Electrical Behaviour	EN 435	Pass
	EN 1081	

WARRANTIES

5-Year Limited Warranty for residential; 3-Year Limited Warranty for commercial

INSTALLATION

- To prevent adhesion problems, make sure that the subfloor is flat (no more than 3mm variance within 2 meters), smooth, clean (including free from fat, grease, chemical substances, mould, salts, etc.), sound, stable and dry <80% RH
- Materials must be acclimatized on site at least 24 hours at room temperature before installing

CARE & MAINTENANCE

- * Maintain regular sweeping, mopping or vacuuming the floor to remove all loose dirt and grit.
- * Do not use a vacuum with a bristle beater bar or scrub brushes to avoid scratching the floor.
- * Do not use acetone based liquids such as nail polish remover to clean stains. Use a neutral PH cleaner.
- * If buffing is needed, use only red buffing pad. Do not use green, black or brown buffing pads.
- * Clean liquid spills immediately to prevent the possibility of stains, slips or falls.
- * Always use floor protection pads when moving heavy objects across the floor to avoid permanent marks or indentations.
- * Avoid using scraping or sharp tools which could remove the wear layer of vinyl.
- * Avoid exposure to long period of strong sunlight without protection of shades.

AS WITH ALL QUALITY VINYL FLOORINGS, COLOURS ARE SUBJECT TO BATCH VARIATIONS.

