

TRENCO[®]
Flooring is an art



US DIAMOND CLIC
(6.5mm)


LILY WHITE DM1230




SANDY BAR DM1430



NEW YORK OAK DM1821

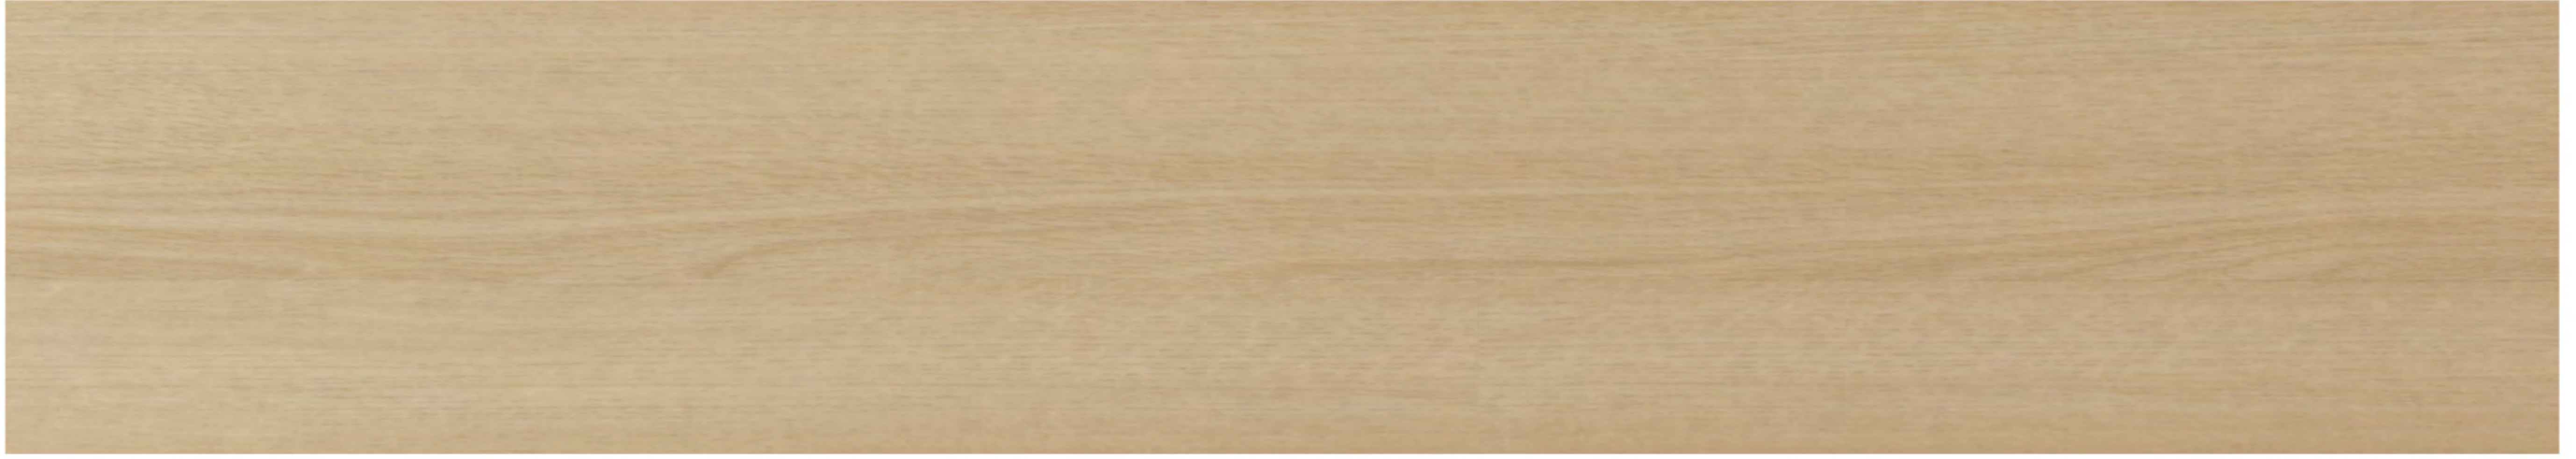

PEANUT JACK DM1575

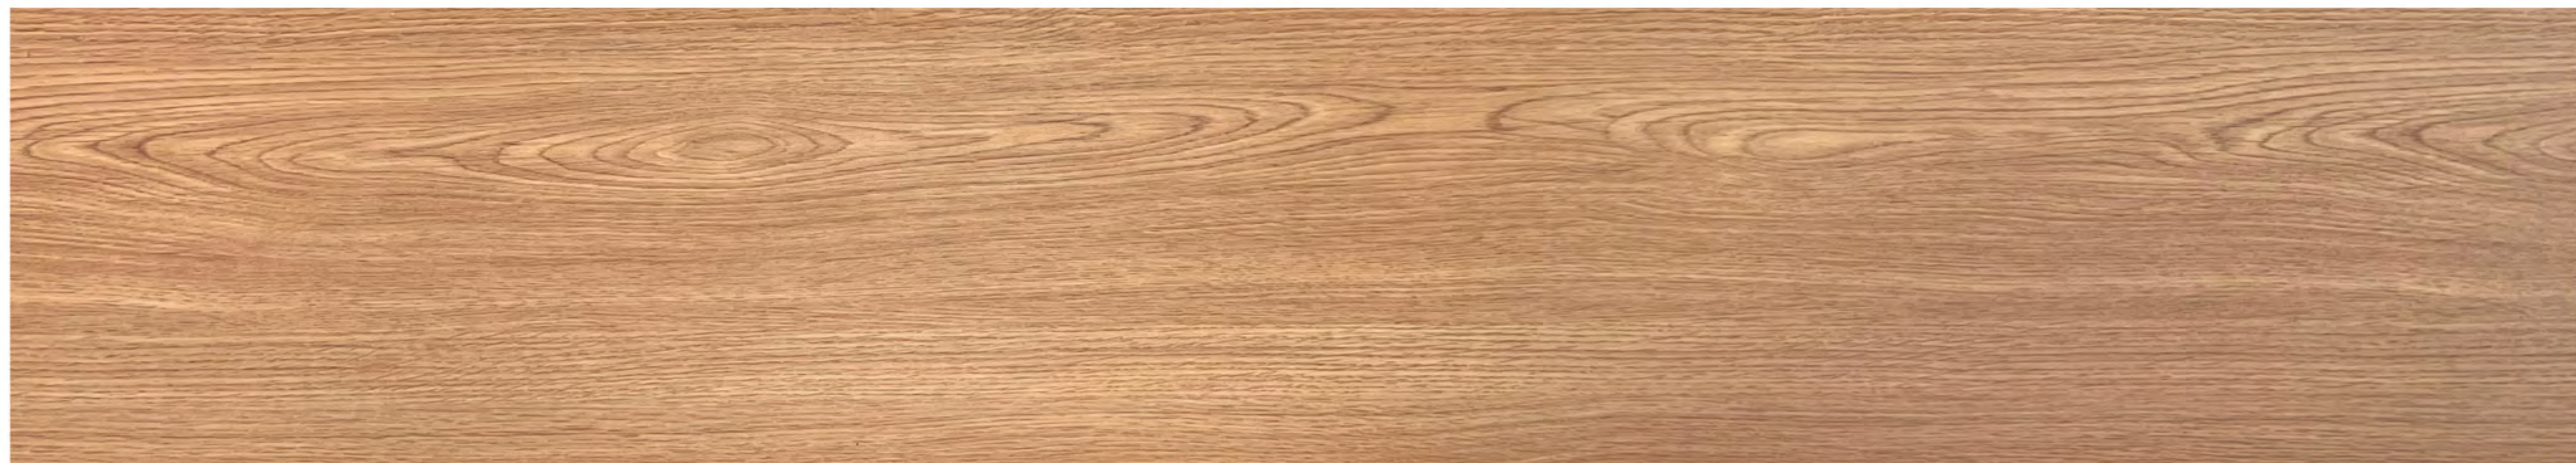

GOLDEN HARVEST DM1223



SHADOW PIE DM1182



MAD HERRINGBONE DM1003A+B



INTRODUCTION

Why use **US DIAMOND CLIC**?

- * Pull strength is much better than regular LVT, especially in high temperature
- * US Diamond Clic have underlayment attached,
It will help to reduce the noise and add the comfort level.
- * Flexibility of design options - available in a large number of colours & styles.
- * Anti-microbial - suitable for hospitals, schools as well as kid's nursery rooms
- * Durability - US Diamond Clic is moisture & stain resistant, so spills can be easily removed
- * Environmental friendly - creates no toxin.
- * Water resistant - good choice for kitchen & mudroom
- * Trencor Flor has passed certification of Floorscore, Greenguard & DIBt

INSTALLATION

1. Substrate must be structurally smooth, stable, level,
clean and must be dry <80% RH
2. Materials must be acclimatized on site at least 48 hours
at room temperature before installing

CARE & MAINTENANCE

- * Maintain regular sweeping, mopping or vacuuming the floor to remove all loose dirt and grit.
- * Do not use a vacuum with a bristle beater bar or scrub brushes to avoid scratching the floor.
- * Do not use acetone based liquids such as nail polish remover to clean stains.
Use a neutral PH cleaner.
- * If buffing is needed, use only red buffing pad.
Do not use green, black or brown buffing pads.
- * Clean liquid spills immediately to prevent the possibility of stains, slips or falls.
- * Always use floor protection pads when moving heavy objects across the floor to avoid permanent marks or indentations.
- * Avoid using scraping or sharp tools which could remove the wear layer of vinyl.
- * Avoid exposure to long period of strong sunlight without protection of shades

NEW CONSTRUCTION STRONGER PRODUCT

**UV Scratch-Resistant
Protective Coating**

Wear Layer

-Excessive wear protection

Film Layer

-Wide color selection

Core Structure

-Waterproof core made of highly durable SPC

-Density of 2000KGS/M³

-Strong locking system

Foam Underlayment (optional)

-Advanced sound reduction

-Added comfort

NEW
&
IMPROVED



Sound Insulation



Anti Bacterial



stain-resistant



stable surface



Easy maintain



scratch-resistant



scratch-resistant



resistant to
cigarette burns



termite-resistant



SPECIFICATIONS:

STYLE NAME	US DIAMOND CLIC
Construction	Unilin Click System
Wear Resistance	Light Commercial/ Residential
Size	48" (1220 mm) x 9" (228 mm)
Total Thickness	6.5mm
Edge Description	Micro Bevelled Edge
Surface Finish	Antique Wood / Crystal Texture
Packing	8 PCS/ CTN 23.96 SQFT/ CTN
WARRANTY	3 - Year Limited Warranty For Commercial 5 - Year Limited Warranty For Residential

* AS IN ALL QUALITY VINYL FLOORINGS, COLOURS ARE SUBJECT TO BATCH VARIATIONS.

The product images shown are illustration purpose only and may not be an exact representation of the product.



Deutsches
Institut
für
Bautechnik



064-035-2902
Environmentally
Preferred Flooring