CLASSICO CLIC 4

WINTER WILLOW C4306

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)

THICKNESS : 5MM

PACKING : 10PCS/CTN (23.64SQFT/CTN)

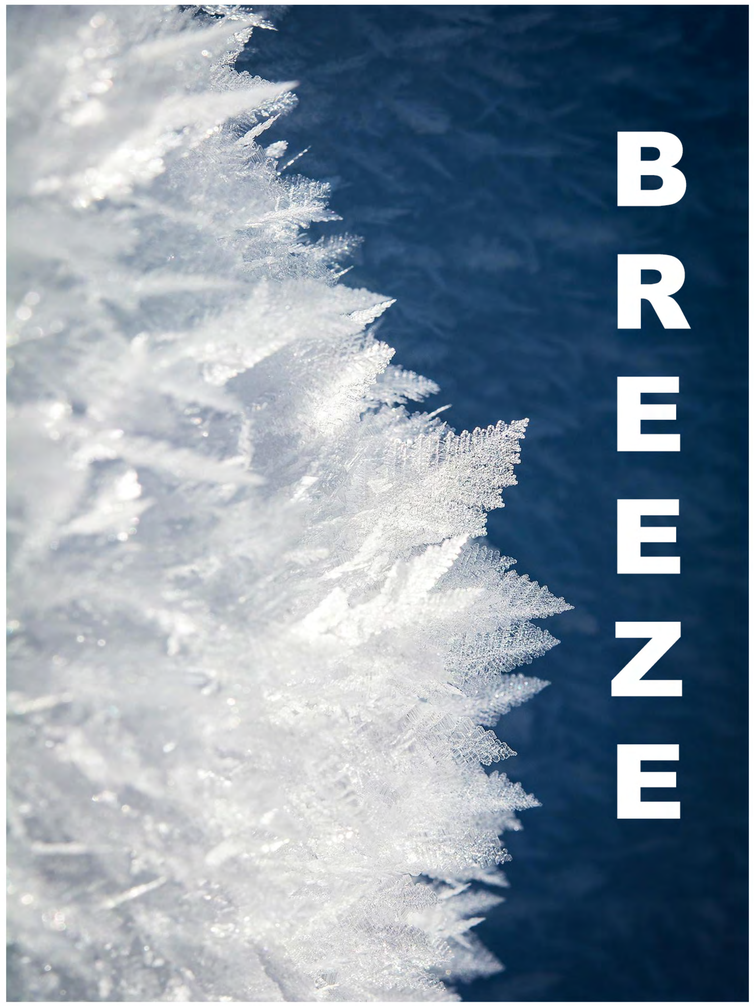

WHITE CLOUD C4763

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)
THICKNESS : 5MM
PACKING : 10PCS/CTN (23.64SQFT/CTN)

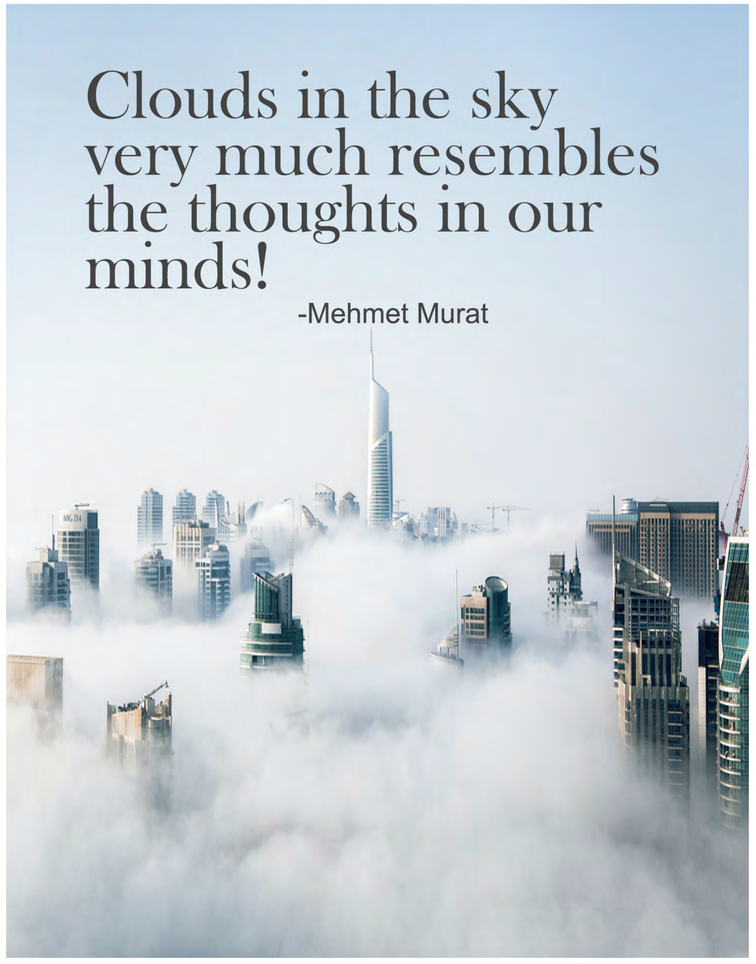

BEACHWOOD C4816

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)
THICKNESS : 5MM
PACKING : 10PCS/CTN (23.64SQFT/CTN)

“Surround yourself with the things you love discard the rest”.

APPLE CIDER OAK C4910A

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)
THICKNESS : 5MM
PACKING : 10PCS/CTN (23.64SQFT/CTN)

HERRINGBONE STYLE

MAPLE PLANK C4510

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)
THICKNESS : 5MM
PACKING : 10PCS/CTN (23.64SQFT/CTN)

RARE VINTAGE C4204

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)
THICKNESS : 5MM
PACKING : 10PCS/CTN (23.64SQFT/CTN)

“Elegance is the only beauty that never fades.”

-Audrey

WESTERN PINE C4836

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)

THICKNESS : 5MM

PACKING : 10PCS/CTN (23.64SQFT/CTN)

WINE OAK C4803

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)

THICKNESS : 5MM

PACKING : 10PCS/CTN (23.64SQFT/CTN)

CINAMON TREE C4073

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)

THICKNESS : 5MM

PACKING : 10PCS/CTN (23.64SQFT/CTN)

FRESH OPAL GREY C4197

SIZE : 48″ (1220 MM) X 7.09″ (180 MM)
THICKNESS : 5MM
PACKING : 10PCS/CTN (23.64SQFT/CTN)

INTRODUCTION:Why use Classico Clic 4?

* Flexibility of design options - available in a large number of colours & styles.
* Resillience - reduces noise & provides underfloor comfort
* Durability - Classico Clic is moisture & stain resistant, so spills can be easily removed
* Water resistant - good choice for kitchen & mudroom
* Bio based plasticiser is made from 100% organic raw material
* Anti-microbial - suitable for hospitals, schools as well as kid's nursery rooms
* Environmental friendly - creates no toxin, Classico Clic uses one of the best plasticizer DOTP.
* Classico clic has passed certification of Floorscore, Greenguard & DIBt

INSTALLATION

1. Substrate must be structurally smooth, stable, level, clean and must be dry <80% RH
2. Materials must be acclimatized on site at least 48 hours at room temperature before installing

CARE & MAINTENANCE

* Maintain regular sweeping, mopping or vacuuming the floor to remove all loose dirt and grit.
* Do not use a vacuum with a bristle beater bar or scrub brushes to avoid scratching the floor.
* Do not use acetone based liquids such as nail polish remover to clean stains. Use a netural PH cleaner.
* If buffing is needed, use only red buffing pad. Do not use green, black or brown buffing pads.
* Clean liquid spills immediately to prevent the possibility of stains, slips or falls.
* Always use floor protection pads when moving heavy objects across the floor to avoid permanent marks or indentations.
* Avoid using scraping or sharp tools which could remove the wear layer of vinyl.
* Avoid exposure to long period of strong sunlight without protection of shades

SPECIFICATIONS:

STYLE NAME	**CLASSICO CLIC 4**
Construction	Unilin Click System
Wear Resistance	Light Commercial/ Residential
Size:	48" (1220 mm) X 7.09" (180 mm)
Total Thickness	5mm
Edge Description	Micro Bevelled Edge
Surface Finish	Antique Wood Texture/ Crystal Texture
Packing	10PCS/ CTN
	23.64 SQFT/ CTN
WARRANTY	3 YEAR LIMITED WARRANTY

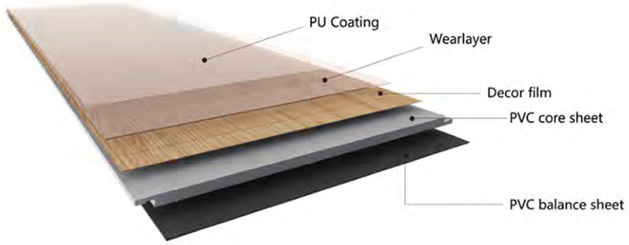

CLIC
Locking System

*** AS IN ALL QUALITY VINYL FLOORINGS, COLOURS ARE SUBJECT TO BATCH VARIATIONS.**

The product images shown are illustration purpose only and may not be an exact representation of the product.

ÉMISSIONS DANS L'AIR INTÉRIEUR A+ A+ A B C

CE

CNAS

Deutsches Institut für Bautechnik DIBt

floor score

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818
GOLD

GreenLabel SINGAPORE
064-035-2902
Environmentally Preferred Flooring