TRENCO®
Flooring is an art
SYDNEY
BROWN TAR SN202

Aspire to Inspire....

BROWN TAR SN202

“Imagination is the beginning of creation,
you imagine what you desire,
you will what you imagine and at last
you create what you will”

– George Bernard Shaw

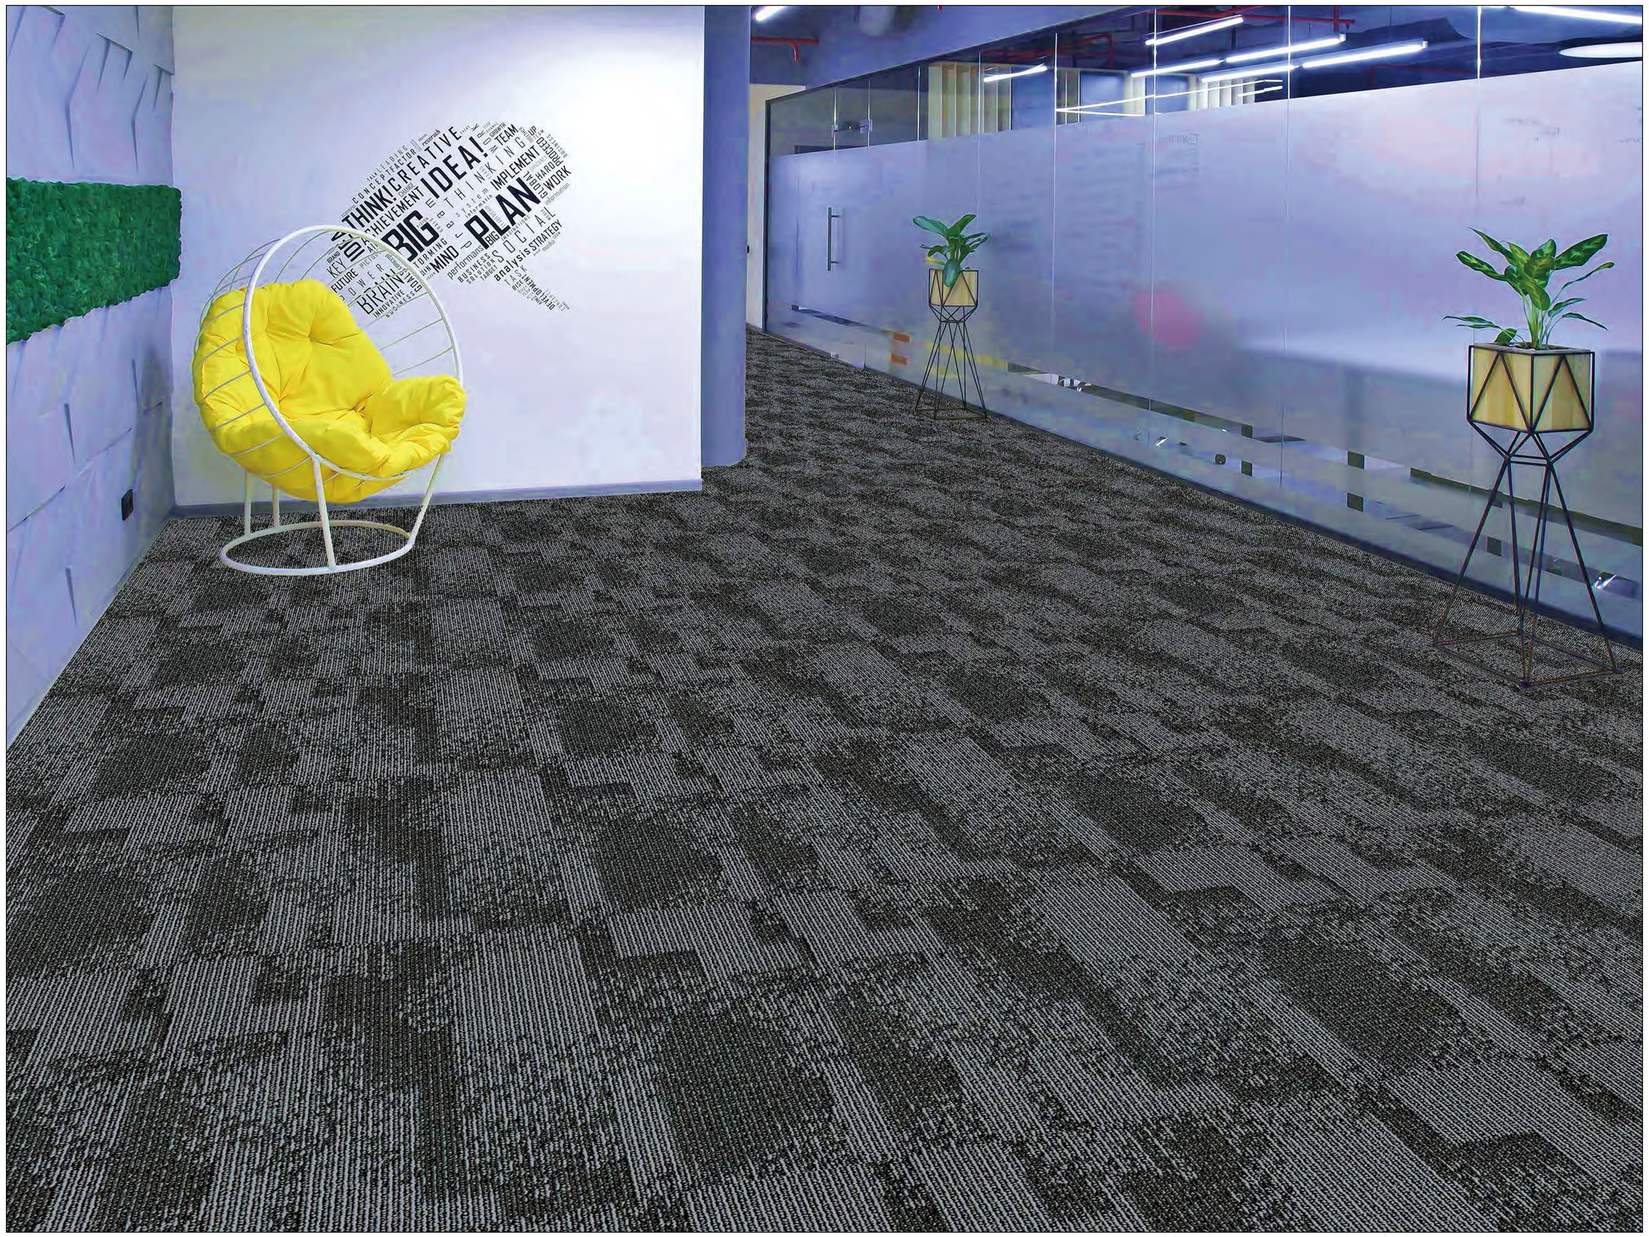

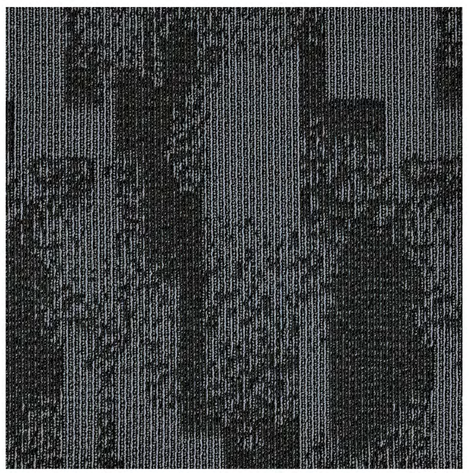

DARK CEMENT SN206

“In the right light, at the right time, everything is extraordinary.”

-Aaron Rose

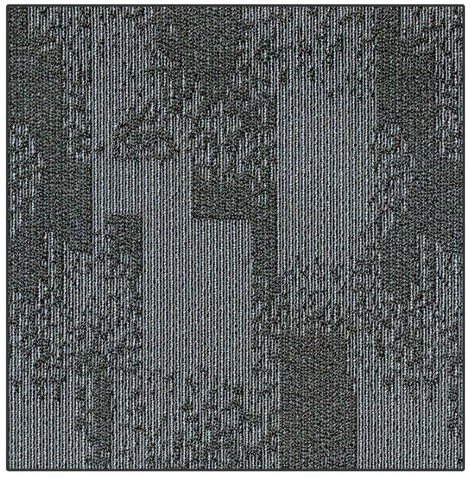

LIGHT CEMENT SN205

SYDNEY

BROWN TAR SN202



LIGHT CEMENT SN205



DARK CEMENT SN206

SPECIFICATIONS

STYLE NAME:	**SYDNEY**
CONSTRUCTION:	Multi-Level loop pile
YARN:	100% Universal Nylon
DYED METHOD:	100% Solution Dyed
GAUGE:	1/12"
PILE HEIGHT:	4mm (+/- 0.5 mm)
TOTAL THICKNESS:	7mm (+/- 0.5mm)
PILE WEIGHT:	21 oz/yd2
TOTAL WEIGHT:	4500g/m² (+/-200g/m²)
TILE BACKING:	PVC with Glass Fiber
PRIMARY BACKING CLOTH:	Non-woven Polyester Spunbonded
YARN TREATMENTS:	3M Scotchgard Permanently Anti Static
ANTI-SOIL,OIL TREATMENT:	3M Scotchgard
TILE SIZE:	60cm x 60cm
PACKING:	14 PCS

PERFORMANCE

ELECTROSTATIC PROPENSITY:	Less than 2.0 kv at 20% R.H. 70 deg F (AATCC 134 1996)
FLAMMABILITY:	ASTM D 2859 Pill Test
RADIANT PANEL:	ASTME 648 (Class 1)
COLORFASTNESS TO LIGHT:	≥ 5 (AATCC 16E)
COLORFASTNESS TO CROCKING :	≥ 5 (AATCC 165)
ACCELERATED SOILING:	5 (ASTM D 6540)
SINGAPORE GREEN LABEL:	039-025-2280
SINGAPORE GREEN BUILDING COUNCIL:	039-004-1901
CRI GREEN LABEL PLUS:	GLP1879
TUFT BIND:	12.8 lbs (ASTM D 1335)
AACHEN DIMENSIONAL STABILITY:	ITTS 004
ROLL CHAIR TESTING:	ITTS 004
WARRANTY :	10-Year Carpet Wear Warranty

*** AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.**

The product images shown are illustration purpose only and may not be an exact representation of the product.

RECOMMENDED INSTALLATION METHODS

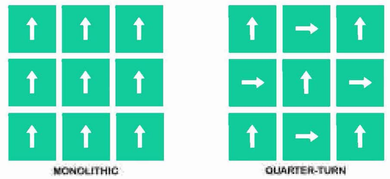

039-025-2280
Environmentally Preferred Carpet